
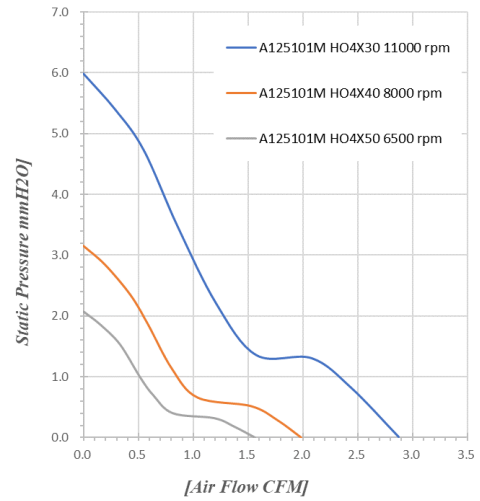
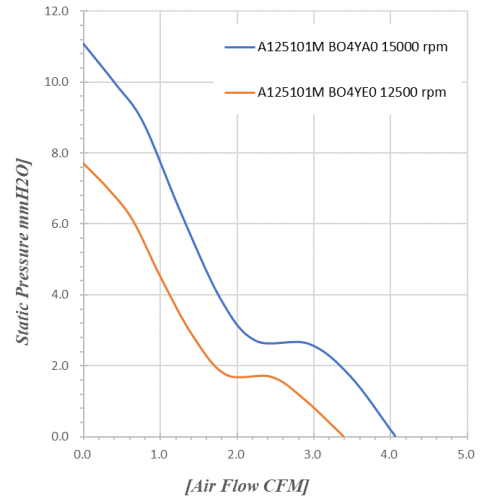


iCar Fan Blower 25*25*10 MM

High Operating Temp. AECQ Series

Reference Spec. MP: 2023/June

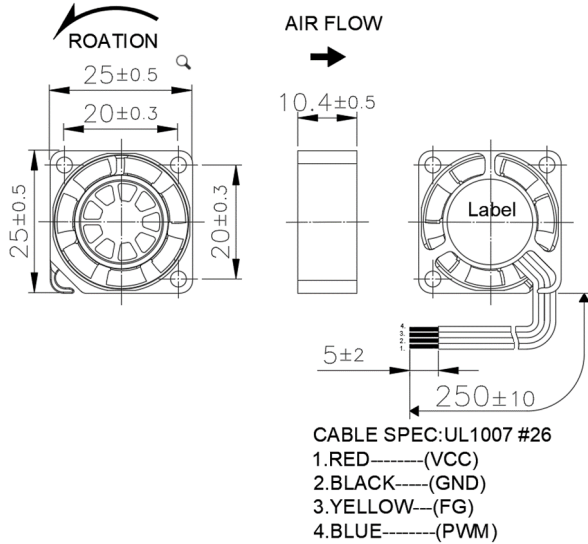

Product Type	Model No.		Control Type	Bearing Type	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise
					VDC	VDC					°C	R.P.M	Amp	Watt	
2510 12V 90°C 系列	A125101M	HO4X30	+/-FG/PWM	Hydraulic	12	10~13.8	-40~90	11000	0.05	0.55	2.87	0.08	0.24	5.99	26.10
	A125101M	HO4X40	+/-FG/PWM	Hydraulic	12	10~13.8	-40~90	8000	0.03	0.31	1.98	0.06	0.12	3.16	19.50
	A125101M	HO4X50	+/-FG/PWM	Hydraulic	12	10~13.8	-40~90	6500	0.02	0.24	1.56	0.04	0.08	2.07	17.10
2510 12V 90°C AECQ系列	A125100M	HO4T30	+/-FG/PWM	Hydraulic	12	8~16	-40~90	11000	0.05	0.55	2.87	0.08	0.24	5.99	26.10
	A125100M	HO4T40	+/-FG/PWM	Hydraulic	12	8~16	-40~90	8000	0.03	0.31	1.98	0.06	0.12	3.16	19.50
	A125100M	HO4T50	+/-FG/PWM	Hydraulic	12	8~16	-40~90	6500	0.02	0.24	1.56	0.04	0.08	2.07	17.10
2510 12V 105°C 系列	A125101M	BO4YA0	+/-FG/PWM	BALL	12	10~13.8	-40~105	15000	0.09	1.09	4.06	0.11	0.44	11.08	33.20
	A125101M	BO4YE0	+/-FG/PWM	BALL	12	10~13.8	-40~105	12500	0.05	0.63	3.27	0.09	0.30	7.74	28.90
2510 12V 105°C AECQ系列	A125101M	BO4UA0	+/-FG/PWM	BALL	12	8~16	-40~105	15000	0.09	1.09	4.06	0.11	0.44	11.08	33.20
	A125101M	BO4UE0	+/-FG/PWM	BALL	12	8~16	-40~105	12500	0.05	0.63	3.27	0.09	0.30	7.74	28.90