
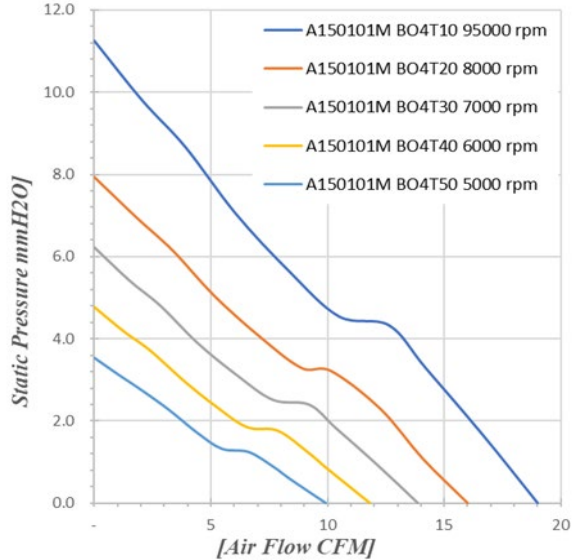


iCar Fan 50*50*10 MM

High Operating Temp. AECQ Series

Reference Spec. MP: 2023/Q3

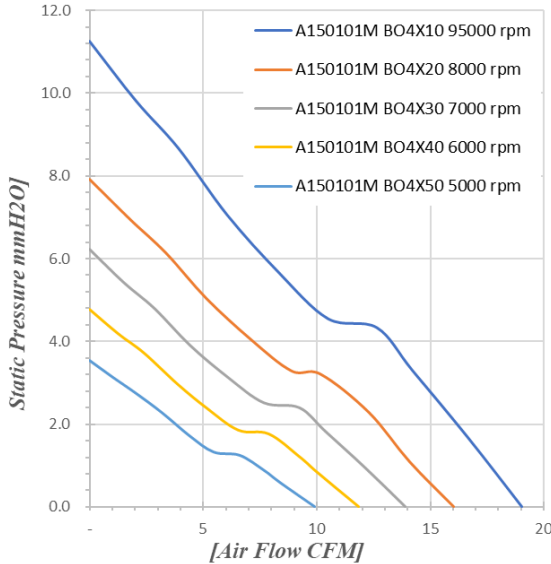

Product Type	Model No.		Control Type	Bearing Type	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise
					VDC	VDC	°C	R.P.M	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
5010 12V 95°C 系列	A150101M	BO4X10	+/-/FG/PWM	Ball	12	6~13.8	-40~95	9500	0.233	2.80	19.01	0.57	0.49	11.25	43.5
	A150101M	BO4X20	+/-/FG/PWM	Ball	12	6~13.8	-40~95	8000	0.140	1.67	16.01	0.45	0.31	7.98	39.8
	A150101M	BO4X30	+/-/FG/PWM	Ball	12	6~13.8	-40~95	7000	0.099	1.19	13.88	0.39	0.25	6.27	35.4
	A150101M	BO4X40	+/-/FG/PWM	Ball	12	6~13.8	-40~95	6000	0.071	0.85	11.83	0.33	0.19	4.81	32.4
	A150101M	BO4X50	+/-/FG/PWM	Ball	12	6~13.8	-40~95	5000	0.051	0.61	9.91	0.28	0.14	3.56	27.6
5010 12V 105°C 系列	A150101M	BO4Y10	+/-/FG/PWM	Ball	12	6~13.8	-40~105	9500	0.233	2.80	19.01	0.57	0.49	11.25	43.5
	A150101M	BO4Y20	+/-/FG/PWM	Ball	12	6~13.8	-40~105	8000	0.140	1.67	16.01	0.45	0.31	7.98	39.8
	A150101M	BO4Y30	+/-/FG/PWM	Ball	12	6~13.8	-40~105	7000	0.099	1.19	13.88	0.39	0.25	6.27	35.4
	A150101M	BO4Y40	+/-/FG/PWM	Ball	12	6~13.8	-40~105	6000	0.071	0.85	11.83	0.33	0.19	4.81	32.4
	A150101M	BO4Y50	+/-/FG/PWM	Ball	12	6~13.8	-40~105	5000	0.051	0.61	9.91	0.28	0.14	3.56	27.6

Product Type	Model No.		Control Type	Bearing Type	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise
					VDC	VDC	°C	R.P.M	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
5010 12V 車規95°C 系列	A150101M	BO4T10	+/-/FG/PWM	Ball	12	8~16	-40~95	9500	0.233	2.80	19.01	0.57	0.49	11.25	43.5
	A150101M	BO4T20	+/-/FG/PWM	Ball	12	8~16	-40~95	8000	0.140	1.67	16.01	0.45	0.31	7.98	39.8
	A150101M	BO4T30	+/-/FG/PWM	Ball	12	8~16	-40~95	7000	0.099	1.19	13.88	0.39	0.25	6.27	35.4
	A150101M	BO4T40	+/-/FG/PWM	Ball	12	8~16	-40~95	6000	0.071	0.85	11.83	0.33	0.19	4.81	32.4
	A150101M	BO4T50	+/-/FG/PWM	Ball	12	8~16	-40~95	5000	0.051	0.61	9.91	0.28	0.14	3.56	27.6
5010 12V 車規105°C 系列	A150101M	BO4U10	+/-/FG/PWM	Ball	12	8~16	-40~105	9500	0.233	2.80	19.01	0.57	0.49	11.25	43.5
	A150101M	BO4U20	+/-/FG/PWM	Ball	12	8~16	-40~105	8000	0.140	1.67	16.01	0.45	0.31	7.98	39.8
	A150101M	BO4U30	+/-/FG/PWM	Ball	12	8~16	-40~105	7000	0.099	1.19	13.88	0.39	0.25	6.27	35.4
	A150101M	BO4U40	+/-/FG/PWM	Ball	12	8~16	-40~105	6000	0.071	0.85	11.83	0.33	0.19	4.81	32.4
	A150101M	BO4U50	+/-/FG/PWM	Ball	12	8~16	-40~105	5000	0.051	0.61	9.91	0.28	0.14	3.56	27.6