



iWater Fan 40*40*28 MM IP68 Rating Dustproof & Waterproof Fan Series

DIMENSION DRAWING

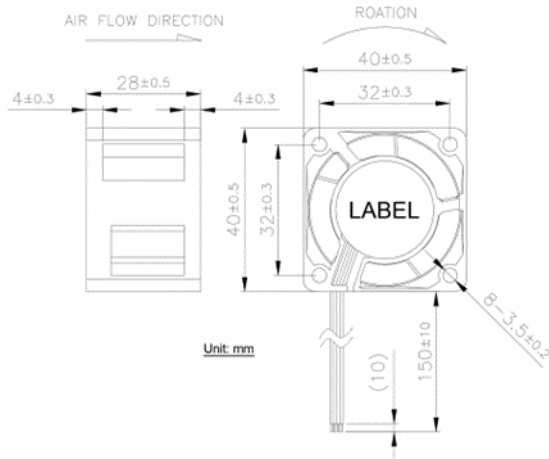

Housing : Plastic (UL 94V-0)
 Impeller : Plastic (UL 94V-0)
 Bearing : Ball bearing
 Lead Wires : UL10368 AWG26 OR Equivalent
 Mass : 52g

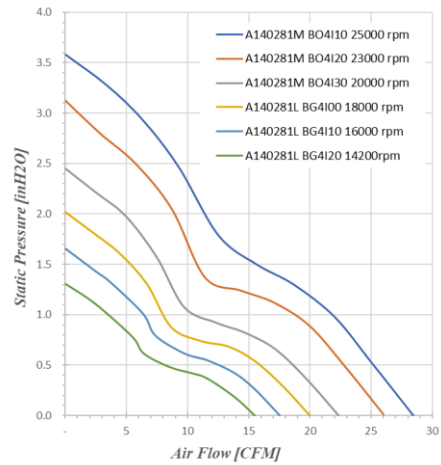

Product Type	Model No.	Control Type	Bearing Type	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise
				VDC	VDC	℃				R.P.M	Amp	Watt	CFM	
4028 12V IP68系列	A140281M BO4110	+/-FG/PWM	BALL	12	7~13.8	-10~70	25000	1.31	15.7	28.5	0.81	3.6	90.9	57.3
	A140281M BO4120	+/-FG/PWM	BALL	12	7~13.8	-10~70	23000	1.00	12.0	26.0	0.74	3.1	79.4	55.5
	A140281M BO4130	+/-FG/PWM	BALL	12	7~13.8	-10~70	20000	0.59	7.0	22.4	0.63	2.5	62.3	52.5
	A140281L BG4100	+/-FG/PWM	BALL	12	7~13.8	-10~70	18000	0.43	5.1	20.0	0.57	2.0	51.3	50.2
	A140281L BG4110	+/-FG/PWM	BALL	12	7~13.8	-10~70	16000	0.30	3.6	17.6	0.50	1.7	42.0	48.2
	A140281L BG4120	+/-FG/PWM	BALL	12	7~13.8	-10~70	14200	0.20	2.4	15.5	0.44	1.3	33.2	44.2
4028 24V IP68系列	A140282L BG4130	+/-FG/PWM	BALL	24	14~27.6	-10~70	25000	0.65	15.7	28.5	0.81	3.6	90.9	57.3
	A140282L BG4140	+/-FG/PWM	BALL	24	14~27.6	-10~70	23000	0.50	12.0	26.0	0.74	3.1	79.4	55.5
	A140282L BG4150	+/-FG/PWM	BALL	24	14~27.6	-10~70	20000	0.29	7.0	22.4	0.63	2.5	62.3	52.5
	A140282L BG4160	+/-FG/PWM	BALL	24	14~27.6	-10~70	18000	0.21	5.1	20.0	0.57	2.0	51.3	50.2
	A140282L BG4170	+/-FG/PWM	BALL	24	14~27.6	-10~70	16000	0.15	3.6	17.6	0.50	1.7	42.0	48.2
	A140282L BG4180	+/-FG/PWM	BALL	24	14~27.6	-10~70	14200	0.10	2.4	15.5	0.44	1.3	33.2	44.2