



iWater Fan 60*60*25 MM IP68 Rating

Dustproof & Waterproof Fan Series

DIMENSION DRAWING

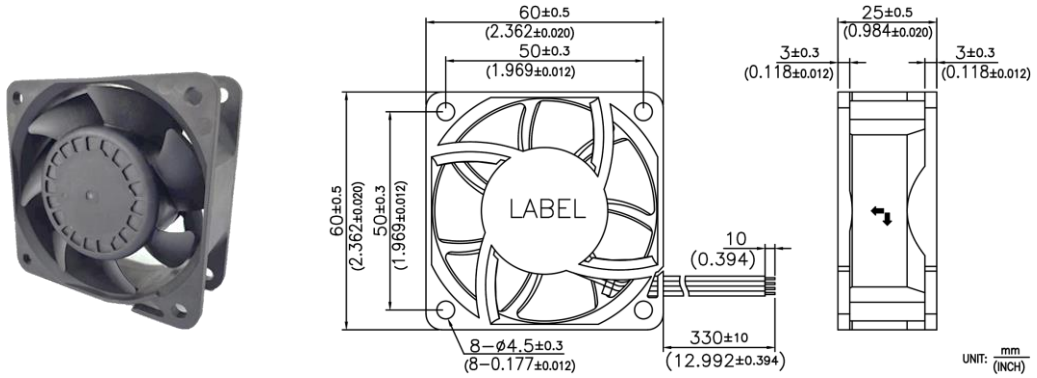

- Housing : Plastic (UL 94V-0)
- Impeller : Plastic (UL 94V-0)
- Bearing : Ball bearing
- Lead Wires : UL10368 AWG26 OR Equivalent
- Mass : 100g

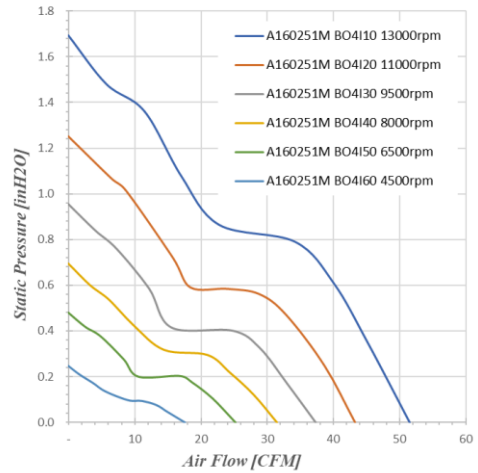

產品別	Model No.		Control Type	Bearing Type	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure			Noise
					VDC	VDC	°C	R.P.M	Amp	Watt	CFM	m ³ /min	inH2O	mmH2O	Pa	dB(A)
6025 12V IP68系列	A160251M	BO4110	+/-FG/PWM	Ball	12	7~13.8	-10~70	13000	1.15	13.8	53.08	1.50	1.70	43.18	423.3	55.8
	A160251M	BO4120	+/-FG/PWM	Ball	12	7~13.8	-10~70	11000	0.70	8.4	43.24	1.22	1.22	30.92	303.1	52.7
	A160251M	BO4130	+/-FG/PWM	Ball	12	7~13.8	-10~70	9500	0.46	5.5	37.33	1.06	0.95	24.25	237.7	48.6
	A160251M	BO4140	+/-FG/PWM	Ball	12	7~13.8	-10~70	8000	0.25	3.0	31.48	0.89	0.70	24.25	173.2	44.2
	A160251M	BO4150	+/-FG/PWM	Ball	12	7~13.8	-10~70	6500	0.19	2.3	25.24	0.71	0.48	12.18	119.4	38.9
	A160251M	BO4160	+/-FG/PWM	Ball	12	7~13.8	-10~70	4500	0.07	0.9	17.63	0.50	0.25	6.29	61.7	29.4
6025 24V IP68系列	A160252M	BO4110	+/-FG/PWM	Ball	24	14~27.6	-10~70	13000	0.58	13.8	53.08	1.50	1.70	43.18	423.3	55.8
	A160252M	BO4120	+/-FG/PWM	Ball	24	14~27.6	-10~70	11000	0.35	8.4	43.24	1.22	1.22	30.92	303.1	52.7
	A160252M	BO4130	+/-FG/PWM	Ball	24	14~27.6	-10~70	9500	0.23	5.5	37.33	1.06	0.95	24.25	237.7	48.6
	A160252M	BO4140	+/-FG/PWM	Ball	24	14~27.6	-10~70	8000	0.13	3.0	31.48	0.89	0.70	24.25	173.2	44.2
	A160252M	BO4150	+/-FG/PWM	Ball	24	14~27.6	-10~70	6500	0.10	2.3	25.24	0.71	0.48	12.18	119.4	38.9
	A160252M	BO4160	+/-FG/PWM	Ball	24	14~27.6	-10~70	4500	0.04	0.9	17.63	0.50	0.25	6.29	61.7	29.4