

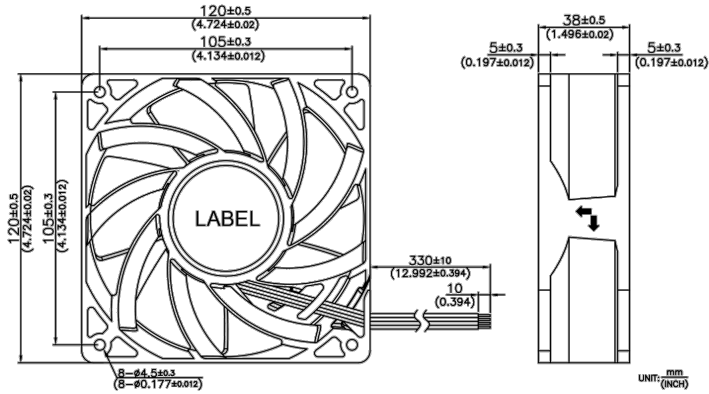


iCloud Fan 120*120*38 MM

DIMENSION DRAWING



- Housing : Plastic (UL 94V-0)
- Impeller : Plastic (UL 94V-0)
- Bearing : Ball bearing
- Lead Wires : UL10368 AWG22 OR Equivalent
- Mass : 275g

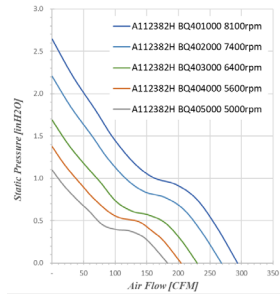

產品別	Model No		Control Type	Bearing Type	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure			Noise
					VDC	VDC	°C	R.P.M	Amp	Watt	CFM	m ³ /min	inH2O	mmH2O	Pa	dB(A)
12038 12V Series	A112381H	BQ402000	+/-FG/PWM	Ball	12	6-13.2	-10-70	7400	5.91	70.9	268.2	7.6	2.21	56.1	550	70.2
	A112381H	BQ403000	+/-FG/PWM	Ball	12	6-13.2	-10-70	6400	3.50	41.9	233.2	6.6	1.68	42.8	419	67.0
	A112381H	BQ404000	+/-FG/PWM	Ball	12	6-13.2	-10-70	5600	2.05	24.6	204.0	5.8	1.38	35.0	343	63.4
	A112381H	BQ405000	+/-FG/PWM	Ball	12	6-13.2	-10-70	5000	1.51	18.1	183.1	5.2	1.10	27.9	273	60.8
	A112381H	BQ406000	+/-FG/PWM	Ball	12	6-13.2	-10-70	4600	1.12	13.5	166.4	4.7	0.92	23.4	229	58.4
	A112381H	BQ407000	+/-FG/PWM	Ball	12	6-13.2	-10-70	3900	0.69	8.3	140.2	4.0	0.67	17.1	168	53.6
	A112381H	BQ408000	+/-FG/PWM	Ball	12	6-13.2	-10-70	3200	0.43	5.1	114.0	3.2	0.47	12.1	118	48.4
A112381H	BQ409000	+/-FG/PWM	Ball	12	6-13.2	-10-70	2800	0.32	3.9	99.5	2.8	0.38	9.7	95	46.9	
12038 24V Series	A112382H	BQ401000	+/-FG/PWM	Ball	24	21.6-26.4	-10-70	8100	3.87	93.0	293.5	8.3	2.65	67.2	659	72.2
	A112382H	BQ402000	+/-FG/PWM	Ball	24	21.6-26.4	-10-70	7400	2.95	70.9	268.2	7.6	2.21	56.1	550	70.2
	A112382H	BQ403000	+/-FG/PWM	Ball	24	21.6-26.4	-10-70	6400	1.75	41.9	233.2	6.6	1.68	42.8	419	67.0
	A112382H	BQ404000	+/-FG/PWM	Ball	24	21.6-26.4	-10-70	5600	1.03	24.6	204.0	5.8	1.38	35.0	343	63.4
	A112382H	BQ405000	+/-FG/PWM	Ball	24	21.6-26.4	-10-70	5000	0.75	18.1	183.1	5.2	1.10	27.9	273	60.8
	A112382H	BQ406000	+/-FG/PWM	Ball	24	21.6-26.4	-10-70	4600	0.56	13.5	166.4	4.7	0.92	23.4	229	58.4
	A112382H	BQ407000	+/-FG/PWM	Ball	24	21.6-26.4	-10-70	3900	0.34	8.3	140.2	4.0	0.67	17.1	168	53.6
	A112382H	BQ408000	+/-FG/PWM	Ball	24	21.6-26.4	-10-70	3200	0.21	5.1	114.0	3.2	0.47	12.1	118	48.4
A112382H	BQ409000	+/-FG/PWM	Ball	24	21.6-26.4	-10-70	2800	0.16	3.9	99.5	2.8	0.38	9.7	95	46.9	
12038 48V Series	A112384H	BQ401000	+/-FG/PWM	Ball	48	36-57	-10-70	8100	1.94	93.0	293.5	8.3	2.65	67.2	659	72.2
	A112384H	BQ402000	+/-FG/PWM	Ball	48	36-57	-10-70	7400	1.48	70.9	268.2	7.6	2.21	56.1	550	70.2
	A112384H	BQ403000	+/-FG/PWM	Ball	48	36-57	-10-70	6400	0.87	41.9	233.2	6.6	1.68	42.8	419	67.0
	A112384H	BQ404000	+/-FG/PWM	Ball	48	36-57	-10-70	5600	0.51	24.6	204.0	5.8	1.38	35.0	343	63.4
	A112384H	BQ405000	+/-FG/PWM	Ball	48	36-57	-10-70	5000	0.38	18.1	183.1	5.2	1.10	27.9	273	60.8
	A112384H	BQ406000	+/-FG/PWM	Ball	48	36-57	-10-70	4600	0.28	13.5	166.4	4.7	0.92	23.4	229	58.4