



iWater & iSALT Fan 80*80*38 MM IP68 Rating

Dustproof & Waterproof & SALT FOG Proof Fan Series

DIMENSION DRAWING

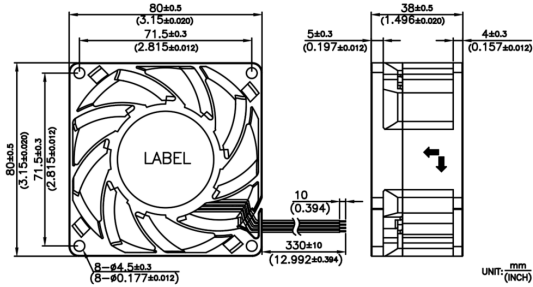

- Housing : Plastic (UL 94V-0)
- Impeller : Plastic (UL 94V-0)
- Bearing : Ball bearing
- Lead Wires : UL10368 AWG22 OR Equivalent
- Mass : 235g

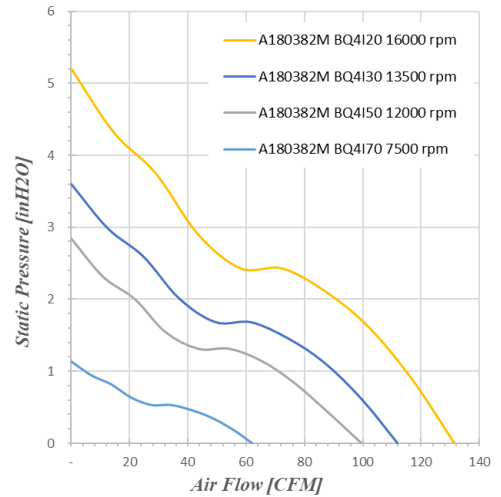

產品別	Model No.		Control Type	Bearing Type	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure			Noise
					VDC	VDC	°C	R.P.M	Amp	Watt	CFM	m ³ /min	inH2O	mmH2O	Pa	
8038 12V IP68 Series	A380381H	BQ4I20	+/-FG/PWM	Ball	12	10~13.8	-10~70	16000	4.24	50.9	131.3	3.7	5.20	132.0	1294	73.2
	A180381H	BQ4I30	+/-FG/PWM	Ball	12	7~13.8	-10~70	13500	2.40	28.8	111.9	3.2	3.60	91.3	896	70.3
	A180381M	BQ4I50	+/-FG/PWM	Ball	12	7~13.8	-10~70	12000	1.80	21.6	99.5	2.8	2.84	72.2	708	65.5
	A180381M	BQ4I70	+/-FG/PWM	Ball	12	7~13.8	-10~70	7500	0.50	6.00	62.1	1.8	1.14	28.8	283	55.0
8038 12V iSALT Series	A380381H	BQ4F20	+/-FG/PWM	Ball	12	10~13.8	-10~70	16000	4.24	50.9	131.3	3.7	5.20	132.0	1294	73.2
	A180381H	BQ4F30	+/-FG/PWM	Ball	12	7~13.8	-10~70	13500	2.40	28.8	111.9	3.2	3.60	91.3	896	70.3
	A180381M	BQ4F50	+/-FG/PWM	Ball	12	7~13.8	-10~70	12000	1.80	21.6	99.5	2.8	2.84	72.2	708	65.5
	A180381M	BQ4F70	+/-FG/PWM	Ball	12	7~13.8	-10~70	7500	0.50	6.00	62.1	1.8	1.14	28.8	283	55.0
8038 24V IP68 Series	A180382M	BQ4I20	+/-FG/PWM	Ball	24	14~27.6	-10~70	16000	2.12	50.9	131.3	3.7	5.20	132.0	1294	73.2
	A180382M	BQ4I30	+/-FG/PWM	Ball	24	14~27.6	-10~70	13500	1.20	28.8	111.9	3.2	3.60	91.3	896	70.3
	A180382M	BQ4I50	+/-FG/PWM	Ball	24	14~27.6	-10~70	12000	0.90	21.6	99.5	2.8	2.84	72.2	708	65.5
	A180382M	BQ4I70	+/-FG/PWM	Ball	24	14~27.6	-10~70	7500	0.25	6.00	62.1	1.8	1.14	28.8	283	55.0
8038 24V iSALT Series	A180382M	BQ4F20	+/-FG/PWM	Ball	24	14~27.6	-10~70	16000	2.12	50.9	131.3	3.7	5.20	132.0	1294	73.2
	A180382M	BQ4F30	+/-FG/PWM	Ball	24	14~27.6	-10~70	13500	1.20	28.8	111.9	3.2	3.60	91.3	896	70.3
	A180382M	BQ4F50	+/-FG/PWM	Ball	24	14~27.6	-10~70	12000	0.90	21.6	99.5	2.8	2.84	72.2	708	65.5
	A180382M	BQ4F70	+/-FG/PWM	Ball	24	14~27.6	-10~70	7500	0.25	6.00	62.1	1.8	1.14	28.8	283	55.0