



## iWater & iSALT Fan 92\*92\*38 MM IP68 Rating

### Dustproof & Waterproof & SALT FOG Proof Fan Series

#### DIMENSION DRAWING

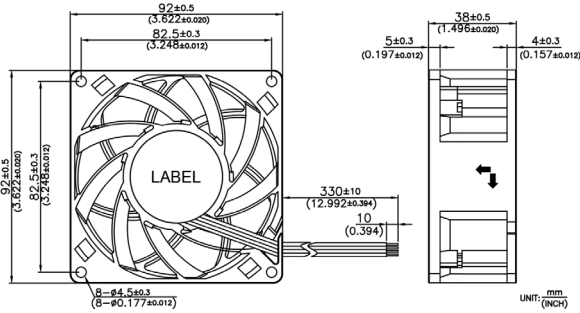

- Housing : Plastic (UL 94V-0)
- Impeller : Plastic (UL 94V-0)
- Bearing : Ball bearing
- Lead Wires : UL10368 AWG22 OR Equivalent
- Mass : 259g

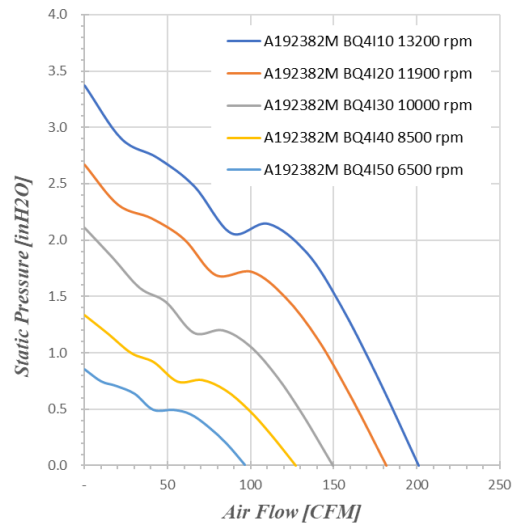

產品別	Model No.		Control Type	Bearing Type	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure			Noise
					VDC	VDC	°C	R.P.M	Amp	Watt	CFM	m <sup>3</sup> /min	inH2O	mmH2O	Pa	dB(A)
9238 12V IP68 Series	A192381M	BQ4I30	+/-FG/PWM	Ball	12	7~13.8	-10~70	10000	2.40	28.8	149.6	4.2	2.11	48.7	526	62.0
	A192381M	BQ4I40	+/-FG/PWM	Ball	12	7~13.8	-10~70	8500	1.54	18.5	127.1	3.6	1.33	30.0	332	58.5
	A192381M	BQ4I50	+/-FG/PWM	Ball	12	7~13.8	-10~70	6500	0.71	8.5	96.5	2.7	0.85	21.6	212	52.9
9238 12V iSALT Series	A192381M	BQ4F30	+/-FG/PWM	Ball	12	7~13.8	-10~70	10000	2.40	28.8	149.6	4.2	2.11	48.7	526	62.0
	A192381M	BQ4F40	+/-FG/PWM	Ball	12	7~13.8	-10~70	8500	1.54	18.5	127.1	3.6	1.33	30.0	332	58.5
	A192381M	BQ4F50	+/-FG/PWM	Ball	12	7~13.8	-10~70	6500	0.71	8.5	96.5	2.7	0.85	21.6	212	52.9
9238 24V IP68 Series	A192382M	BQ4I10	+/-FG/PWM	Ball	24	14~27.6	-10~70	13200	2.93	70.4	201.0	5.7	3.37	85.6	839	71.9
	A192382M	BQ4I20	+/-FG/PWM	Ball	24	14~27.6	-10~70	11900	2.15	51.6	181.8	5.1	2.67	67.8	665	69.0
	A192382M	BQ4I30	+/-FG/PWM	Ball	24	14~27.6	-10~70	10000	1.20	28.8	149.6	4.2	2.11	48.7	526	62.0
	A192382M	BQ4I40	+/-FG/PWM	Ball	24	14~27.6	-10~70	8500	0.77	18.5	127.1	3.6	1.33	30.0	332	58.5
	A192382M	BQ4I50	+/-FG/PWM	Ball	24	14~27.6	-10~70	6500	0.35	8.5	96.5	2.7	0.85	21.6	212	52.9
9238 24V iSALT Series	A192382M	BQ4F10	+/-FG/PWM	Ball	24	14~27.6	-10~70	13200	2.93	70.4	201.0	5.7	3.37	85.6	839	71.9
	A192382M	BQ4F20	+/-FG/PWM	Ball	24	14~27.6	-10~70	11900	2.15	51.6	181.8	5.1	2.67	67.8	665	69.0
	A192382M	BQ4F30	+/-FG/PWM	Ball	24	14~27.6	-10~70	10000	1.20	28.8	149.6	4.2	2.11	48.7	526	62.0
	A192382M	BQ4F40	+/-FG/PWM	Ball	24	14~27.6	-10~70	8500	0.77	18.5	127.1	3.6	1.33	30.0	332	58.5
	A192382M	BQ4F50	+/-FG/PWM	Ball	24	14~27.6	-10~70	6500	0.35	8.5	96.5	2.7	0.85	21.6	212	52.9