



iWater & iSALT Fan 120*120*38 MM IP68 Rating

Dustproof & Waterproof & SALT FOG Proof Fan Series

DIMENSION DRAWING

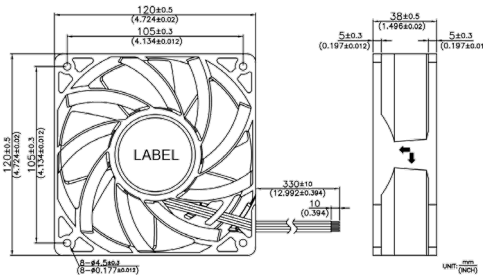

- Housing : Plastic (UL 94V-0)
- Impeller : Plastic (UL 94V-0)
- Bearing : Ball bearing
- Lead Wires : UL10368 AWG22 OR Equivalent
- Mass : 342g

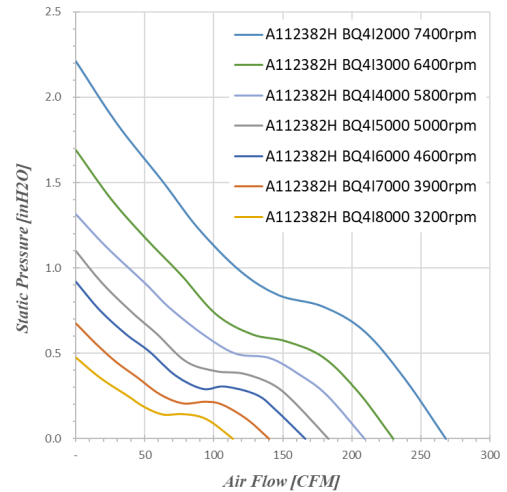

產品別	Model No		Control Type	Bearing Type	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise
					VDC	VDC	°C	R.P.M	Amp	Watt	CFM	m ³ /min	inH2O	mmH2O	
12038 12V IP68 Series	A112381H	BQ4I6000	+/-FG/PWM	Ball	12	7~13.8	-10~70	4600	1.33	15.9	166.4	4.7	0.92	23.4	58.4
	A112381H	BQ4I7000	+/-FG/PWM	Ball	12	7~13.8	-10~70	3900	0.81	9.7	140.2	4.0	0.67	17.1	53.6
	A112381H	BQ4I8000	+/-FG/PWM	Ball	12	7~13.8	-10~70	3200	0.45	5.4	114.0	3.2	0.47	12.1	48.4
12038 12V iSALT Series	A112381H	BQ4F6000	+/-FG/PWM	Ball	12	7~13.8	-10~70	4600	1.33	15.9	166.4	4.7	0.92	23.4	58.4
	A112381H	BQ4F7000	+/-FG/PWM	Ball	12	7~13.8	-10~70	3900	0.81	9.7	140.2	4.0	0.67	17.1	53.6
	A112381H	BQ4F8000	+/-FG/PWM	Ball	12	7~13.8	-10~70	3200	0.45	5.4	114.0	3.2	0.47	12.1	48.4
12038 24V IP68 Series	A112382H	BQ4I2000	+/-FG/PWM	Ball	24	14~27.6	-10~70	7400	3.15	75.5	268.2	7.6	2.21	56.1	70.2
	A112382H	BQ4I3000	+/-FG/PWM	Ball	24	14~27.6	-10~70	6400	1.87	44.9	233.2	6.6	1.68	42.8	67.0
	A112382H	BQ4I4000	+/-FG/PWM	Ball	24	14~27.6	-10~70	5800	1.33	31.9	209.2	5.9	1.40	35.5	64.2
	A112382H	BQ4I5000	+/-FG/PWM	Ball	24	14~27.6	-10~70	5000	0.90	21.6	183.1	5.2	1.10	27.9	60.8
	A112382H	BQ4I6000	+/-FG/PWM	Ball	24	14~27.6	-10~70	4600	0.66	15.9	166.4	4.7	0.92	23.4	58.4
	A112382H	BQ4I7000	+/-FG/PWM	Ball	24	14~27.6	-10~70	3900	0.40	9.7	140.2	4.0	0.67	17.1	53.6
	A112382H	BQ4I8000	+/-FG/PWM	Ball	24	14~27.6	-10~70	3200	0.22	5.4	114.0	3.2	0.47	12.1	48.4
12038 24V iSALT Series	A112382H	BQ4F2000	+/-FG/PWM	Ball	24	14~27.6	-10~70	7400	3.15	75.5	268.2	7.6	2.21	56.1	70.2
	A112382H	BQ4F3000	+/-FG/PWM	Ball	24	14~27.6	-10~70	6400	1.87	44.9	233.2	6.6	1.68	42.8	67.0
	A112382H	BQ4F4000	+/-FG/PWM	Ball	24	14~27.6	-10~70	5800	1.33	31.9	209.2	5.9	1.40	35.5	64.2
	A112382H	BQ4F5000	+/-FG/PWM	Ball	24	14~27.6	-10~70	5000	0.90	21.6	183.1	5.2	1.10	27.9	60.8
	A112382H	BQ4F6000	+/-FG/PWM	Ball	24	14~27.6	-10~70	4600	0.66	15.9	166.4	4.7	0.92	23.4	58.4
	A112382H	BQ4F7000	+/-FG/PWM	Ball	24	14~27.6	-10~70	3900	0.40	9.7	140.2	4.0	0.67	17.1	53.6
A112382H	BQ4F8000	+/-FG/PWM	Ball	24	14~27.6	-10~70	3200	0.22	5.4	114.0	3.2	0.47	12.1	48.4	