



iWater & iSALT Fan 40*40*20 MM IP68 Rating Dustproof & Waterproof & SALT FOG Proof Fan Series

DIMENSION DRAWING

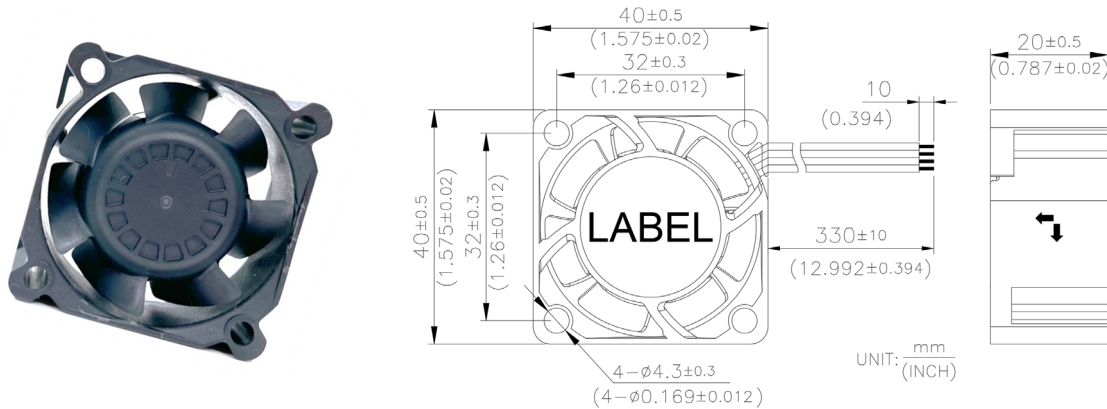

- Housing : Plastic (UL 94V-0)
- Impeller : Plastic (UL 94V-0)
- Bearing : Ball bearing
- Lead Wires : UL10368 AWG26 OR Equivalent
- Mass : 39.3g

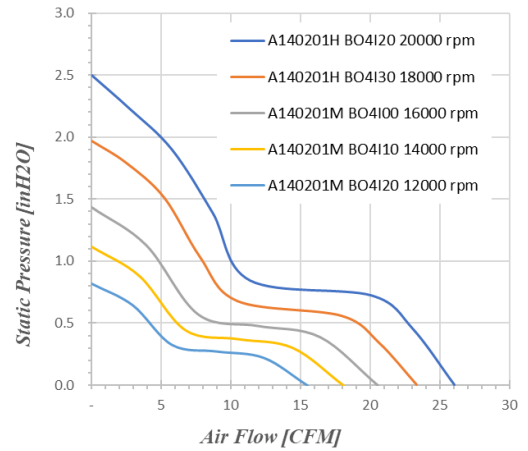

Product Type	Model No.		Control Type	Bearing Type	Voltage	Operating Voltage Range	Operating Temp.	Speed	Current	Power	Maximum Air Flow		Maximum Air Pressure			Noise
					VDC	VDC	°C	R.P.M	A	W	CFM	m3/min	inH2O	mmH2O	Pa	dB(A)
4020 12V IP68 Series	A140201H	BO4I20	+/-FG/PWM	Ball	12	6~13.8	-10~70	20000	0.95	11.4	26.0	0.74	2.50	63.5	623	56.4
	A140201H	BO4I30	+/-FG/PWM	Ball	12	6~13.8	-10~70	18000	0.72	8.6	23.3	0.66	1.97	50.0	490	54.2
	A140201M	BO4I00	+/-FG/PWM	Ball	12	6~13.8	-10~70	16000	0.51	6.1	20.6	0.58	1.43	36.4	357	52.4
	A140201M	BO4I10	+/-FG/PWM	Ball	12	6~13.8	-10~70	14000	0.32	3.8	18.1	0.51	1.11	28.3	277	49.0
	A140201M	BO4I20	+/-FG/PWM	Ball	12	6~13.8	-10~70	12000	0.22	2.6	15.5	0.44	0.82	20.8	204	45.7
	A140201M	BO4I30	+/-FG/PWM	Ball	12	6~13.8	-10~70	9000	0.10	1.1	11.3	0.32	0.45	11.4	112	37.4
4020 12V iSALT Series	A140201H	BO4F20	+/-FG/PWM	Ball	12	6~13.8	-10~70	20000	0.95	11.4	26.0	0.74	2.50	63.5	623	56.4
	A140201H	BO4F30	+/-FG/PWM	Ball	12	6~13.8	-10~70	18000	0.72	8.6	23.3	0.66	1.97	50.0	490	54.2
	A140201M	BO4F00	+/-FG/PWM	Ball	12	6~13.8	-10~70	16000	0.51	6.1	20.6	0.58	1.43	36.4	357	52.4
	A140201M	BO4F10	+/-FG/PWM	Ball	12	6~13.8	-10~70	14000	0.32	3.8	18.1	0.51	1.11	28.3	277	49.0
	A140201M	BO4F20	+/-FG/PWM	Ball	12	6~13.8	-10~70	12000	0.22	2.6	15.5	0.44	0.82	20.8	204	45.7
	A140201M	BO4F30	+/-FG/PWM	Ball	12	6~13.8	-10~70	9000	0.10	1.1	11.3	0.32	0.45	11.4	112	37.4