



iWater & iSALT Fan 40*40*28 MM IP68 Rating

Dustproof & Waterproof & SALT FOG Proof Fan Series

DIMENSION DRAWING

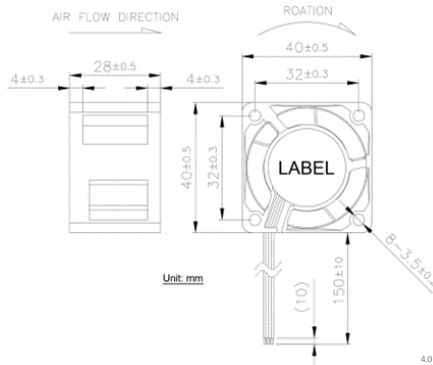

- Housing : Plastic (UL 94V-0)
- Impeller : Plastic (UL 94V-0)
- Bearing : Ball bearing
- Lead Wires : UL10368 AWG26 OR Equivalent
- Mass : 52.4g



Product Type	Model No.		Control Type	Bearing Type	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure			Noise
					VDC	VDC	°C	R.P.M	Amp	Watt	CFM	m ³ /min	inH2O	mmH2O	Pa	dB(A)
4028 12V IP68 Series	A140281M	BO4110	+/-FG/PWM	BALL	12	6~13.8	-10~70	25000	1.31	15.7	28.5	0.81	3.6	90.9	891	57.3
	A140281M	BO4120	+/-FG/PWM	BALL	12	6~13.8	-10~70	23000	1.00	12.0	26.0	0.74	3.1	79.4	779	55.5
	A140281M	BO4130	+/-FG/PWM	BALL	12	6~13.8	-10~70	20000	0.59	7.0	22.4	0.63	2.5	62.3	611	52.5
	A140281L	BG4100	+/-FG/PWM	BALL	12	6~13.8	-10~70	18000	0.43	5.1	20.0	0.57	2.0	51.3	503	50.2
	A140281L	BG4110	+/-FG/PWM	BALL	12	6~13.8	-10~70	16000	0.30	3.6	17.6	0.50	1.7	42.0	412	48.2
	A140281L	BG4120	+/-FG/PWM	BALL	12	6~13.8	-10~70	14200	0.20	2.4	15.5	0.44	1.3	33.2	326	44.2
4028 12V iSALT Series	A140281M	BO4F10	+/-FG/PWM	BALL	12	6~13.8	-10~70	25000	1.31	15.7	28.5	0.81	3.6	90.9	891	57.3
	A140281M	BO4F20	+/-FG/PWM	BALL	12	6~13.8	-10~70	23000	1.00	12.0	26.0	0.74	3.1	79.4	779	55.5
	A140281M	BO4F30	+/-FG/PWM	BALL	12	6~13.8	-10~70	20000	0.59	7.0	22.4	0.63	2.5	62.3	611	52.5
	A140281L	BG4F00	+/-FG/PWM	BALL	12	6~13.8	-10~70	18000	0.43	5.1	20.0	0.57	2.0	51.3	503	50.2
	A140281L	BG4F10	+/-FG/PWM	BALL	12	6~13.8	-10~70	16000	0.30	3.6	17.6	0.50	1.7	42.0	412	48.2
	A140281L	BG4F20	+/-FG/PWM	BALL	12	6~13.8	-10~70	14200	0.20	2.4	15.5	0.44	1.3	33.2	326	44.2
4028 24V IP68 Series	A140282L	BO4130	+/-FG/PWM	BALL	24	14~27.6	-10~70	25000	0.65	15.7	28.5	0.81	3.6	90.9	891	57.3
	A140282L	BO4140	+/-FG/PWM	BALL	24	14~27.6	-10~70	23000	0.50	12.0	26.0	0.74	3.1	79.4	779	55.5
	A140282L	BO4150	+/-FG/PWM	BALL	24	14~27.6	-10~70	20000	0.29	7.0	22.4	0.63	2.5	62.3	611	52.5
	A140282L	BO4160	+/-FG/PWM	BALL	24	14~27.6	-10~70	18000	0.21	5.1	20.0	0.57	2.0	51.3	503	50.2
	A140282L	BO4170	+/-FG/PWM	BALL	24	14~27.6	-10~70	16000	0.15	3.6	17.6	0.50	1.7	42.0	412	48.2
	A140282L	BO4180	+/-FG/PWM	BALL	24	14~27.6	-10~70	14200	0.10	2.4	15.5	0.44	1.3	33.2	326	44.2
4028 24V iSALT Series	A140282L	BO4F30	+/-FG/PWM	BALL	24	14~27.6	-10~70	25000	0.65	15.7	28.5	0.81	3.6	90.9	891	57.3
	A140282L	BO4F40	+/-FG/PWM	BALL	24	14~27.6	-10~70	23000	0.50	12.0	26.0	0.74	3.1	79.4	779	55.5
	A140282L	BO4F50	+/-FG/PWM	BALL	24	14~27.6	-10~70	20000	0.29	7.0	22.4	0.63	2.5	62.3	611	52.5
	A140282L	BO4F60	+/-FG/PWM	BALL	24	14~27.6	-10~70	18000	0.21	5.1	20.0	0.57	2.0	51.3	503	50.2
	A140282L	BO4F70	+/-FG/PWM	BALL	24	14~27.6	-10~70	16000	0.15	3.6	17.6	0.50	1.7	42.0	412	48.2
	A140282L	BO4F80	+/-FG/PWM	BALL	24	14~27.6	-10~70	14200	0.10	2.4	15.5	0.44	1.3	33.2	326	44.2