



iWater & iSALT Fan 80*80*25 MM IP68 Rating Dustproof & Waterproof & SALT FOG Proof Fan Series

DIMENSION DRAWING

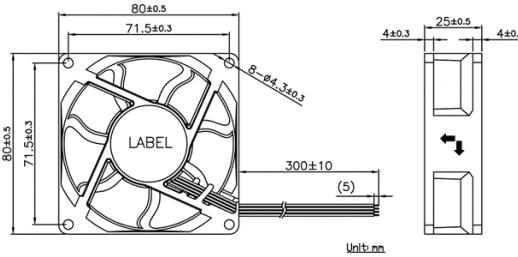

- Housing : Plastic (UL 94V-0)
- Impeller : Plastic (UL 94V-0)
- Bearing : Ball bearing
- Lead Wires : UL10368 AWG26 OR Equivalent
- Mass : 87.5g

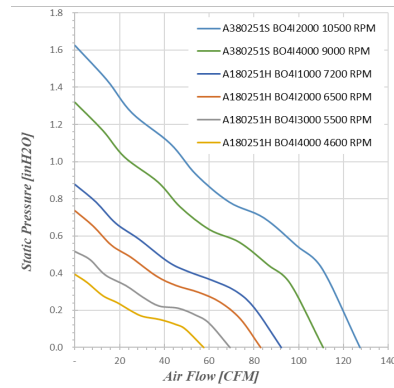

產品別	Model No.		Control Type	Bearing Type	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise
					VDC	VDC	°C	R.P.M	Amp	Watt	CFM	m ³ /min	inH2O	mmH2O	dB(A)
8025 12V IP68 Series	A380251S	BO4I2000	+/-FG/PWM	Ball	12	10~13.8	-10~70	10500	3.44	41.3	127.3	3.60	1.63	41.3	64.3
	A380251S	BO4I4000	+/-FG/PWM	Ball	12	10~13.8	-10~70	9000	1.95	23.4	110.9	3.14	1.32	33.5	59.5
	A180251H	BO4I1000	+/-FG/PWM	Ball	12	6~13.8	-10~70	7200	1.20	14.4	92.2	2.61	0.88	22.3	58.0
	A180251H	BO4I2000	+/-FG/PWM	Ball	12	6~13.8	-10~70	6500	0.81	9.7	83.1	2.35	0.74	18.7	53.1
	A180251H	BO4I3000	+/-FG/PWM	Ball	12	6~13.8	-10~70	5500	0.48	5.8	69.3	1.96	0.52	13.1	51.5
	A180251H	BO4I4000	+/-FG/PWM	Ball	12	6~13.8	-10~70	4600	0.31	3.7	57.7	1.63	0.39	10.0	43.3
8025 12V iSALT Series	A380251S	BO4F2000	+/-FG/PWM	Ball	12	10~13.8	-10~70	10500	3.44	41.3	127.3	3.60	1.63	41.3	64.3
	A380251S	BO4F4000	+/-FG/PWM	Ball	12	10~13.8	-10~70	9000	1.95	23.4	110.9	3.14	1.32	33.5	59.5
	A180251H	BO4F1000	+/-FG/PWM	Ball	12	6~13.8	-10~70	7200	1.20	14.4	92.2	2.61	0.88	22.3	58.0
	A180251H	BO4F2000	+/-FG/PWM	Ball	12	6~13.8	-10~70	6500	0.81	9.7	83.1	2.35	0.74	18.7	53.1
	A180251H	BO4F3000	+/-FG/PWM	Ball	12	6~13.8	-10~70	5500	0.48	5.8	69.3	1.96	0.52	13.1	51.5
	A180251H	BO4F4000	+/-FG/PWM	Ball	12	6~13.8	-10~70	4600	0.31	3.7	57.7	1.63	0.39	10.0	43.3
8025 24V IP68 Series	A180252H	BO4I2000	+/-FG/PWM	Ball	24	14~27.6	-10~70	10500	1.72	41.3	127.3	3.60	1.63	41.3	64.3
	A180252H	BO4I3000	+/-FG/PWM	Ball	24	14~27.6	-10~70	9000	0.98	23.4	110.9	3.14	1.32	33.5	59.5
	A180252H	BO4I4000	+/-FG/PWM	Ball	24	14~27.6	-10~70	7200	0.60	14.4	92.2	2.61	0.88	22.3	58.0
	A180252H	BO4I5000	+/-FG/PWM	Ball	24	14~27.6	-10~70	6500	0.41	9.7	83.1	2.35	0.74	18.7	53.1
	A180252H	BO4I6000	+/-FG/PWM	Ball	24	14~27.6	-10~70	5500	0.24	5.8	69.3	1.96	0.52	13.1	51.5
	A180252H	BO4I7000	+/-FG/PWM	Ball	24	14~27.6	-10~70	4600	0.16	3.7	57.7	1.63	0.39	10.0	43.3
8025 24V iSALT Series	A180252H	BO4F2000	+/-FG/PWM	Ball	24	14~27.6	-10~70	10500	1.72	41.3	127.3	3.60	1.63	41.3	64.3
	A180252H	BO4F3000	+/-FG/PWM	Ball	24	14~27.6	-10~70	9000	0.98	23.4	110.9	3.14	1.32	33.5	59.5
	A180252H	BO4F4000	+/-FG/PWM	Ball	24	14~27.6	-10~70	7200	0.60	14.4	92.2	2.61	0.88	22.3	58.0
	A180252H	BO4F5000	+/-FG/PWM	Ball	24	14~27.6	-10~70	6500	0.41	9.7	83.1	2.35	0.74	18.7	53.1
	A180252H	BO4F6000	+/-FG/PWM	Ball	24	14~27.6	-10~70	5500	0.24	5.8	69.3	1.96	0.52	13.1	51.5
	A180252H	BO4F7000	+/-FG/PWM	Ball	24	14~27.6	-10~70	4600	0.16	3.7	57.7	1.63	0.39	10.0	43.3