



iWater & iSALT Fan 92*92*25 MM IP68 Rating Dustproof & Waterproof & SALT FOG Proof Fan Series

DIMENSION DRAWING

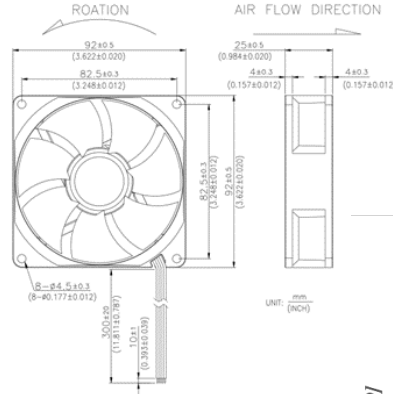

- Housing : Plastic (UL 94V-0)
- Impeller : Plastic (UL 94V-0)
- Bearing : Ball bearing
- Lead Wires : UL10368 AWG26 OR Equivalent
- Mass : 109.8g

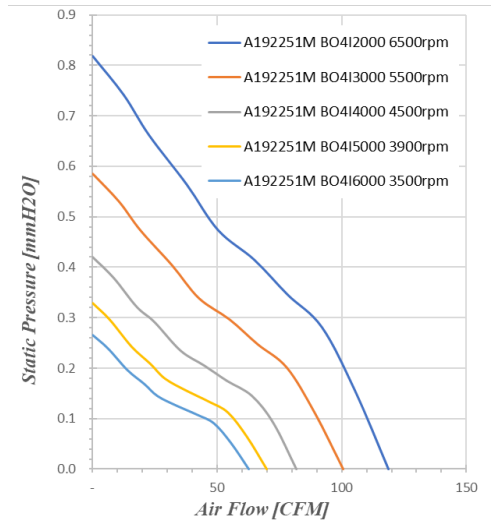

Product Type	Model No.		Control Type	Bearing Type	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure			Noise
					VDC	VDC	℃	R.P.M	Amp	Watt	CFM	m ³ /min	inH2O	mmH2O	Pa	dB(A)
9225 12V IP68 Series	A192251M	BO4I2000	+/-FG/PWM	Ball	12	6~13.8	-10~70	6000	1.50	18.0	118.7	3.36	0.82	20.8	204	57.8
	A192251M	BO4I3000	+/-FG/PWM	Ball	12	6~13.8	-10~70	5500	0.93	11.1	100.4	2.84	0.59	14.9	204	51.0
	A192251M	BO4I4000	+/-FG/PWM	Ball	12	6~13.8	-10~70	4500	0.45	5.3	81.7	2.31	0.42	10.7	204	46.5
	A192251M	BO4I5000	+/-FG/PWM	Ball	12	6~13.8	-10~70	3900	0.29	3.4	69.8	1.97	0.33	8.4	204	42.0
	A192251M	BO4I6000	+/-FG/PWM	Ball	12	6~13.8	-10~70	3500	0.21	2.5	62.6	1.77	2.75	69.8	204	38.4
9225 12V iSALT Series	A192251M	BO4F2000	+/-FG/PWM	Ball	12	6~13.8	-10~70	6000	1.50	18.0	118.7	3.36	0.82	20.8	204	57.8
	A192251M	BO4F3000	+/-FG/PWM	Ball	12	6~13.8	-10~70	5500	0.93	11.1	100.4	2.84	0.59	14.9	204	51.0
	A192251M	BO4F4000	+/-FG/PWM	Ball	12	6~13.8	-10~70	4500	0.45	5.3	81.7	2.31	0.42	10.7	204	46.5
	A192251M	BO4F5000	+/-FG/PWM	Ball	12	6~13.8	-10~70	3900	0.29	3.4	69.8	1.97	0.33	8.4	204	42.0
	A192251M	BO4F6000	+/-FG/PWM	Ball	12	6~13.8	-10~70	3500	0.21	2.5	62.6	1.77	2.75	69.8	204	38.4
9225 24V IP68 Series	A192252M	BO4I2000	+/-FG/PWM	Ball	24	14~27.6	-10~70	6500	0.75	18.0	118.7	3.36	0.82	20.8	204	57.8
	A192252M	BO4I3000	+/-FG/PWM	Ball	24	14~27.6	-10~70	5500	0.46	11.1	100.4	2.84	0.59	14.9	146	51.0
	A192252M	BO4I4000	+/-FG/PWM	Ball	24	14~27.6	-10~70	4500	0.22	5.3	81.7	2.31	0.42	10.7	104	46.5
	A192252M	BO4I5000	+/-FG/PWM	Ball	24	14~27.6	-10~70	3900	0.14	3.4	69.8	1.97	0.33	8.4	82	42.0
	A192252M	BO4I6000	+/-FG/PWM	Ball	24	14~27.6	-10~70	3500	0.10	2.5	62.6	1.77	2.75	69.8	684	38.4
9225 24V iSALT Series	A192252M	BO4F2000	+/-FG/PWM	Ball	24	14~27.6	-10~70	6500	0.75	18.0	118.7	3.36	0.82	20.8	204	57.8
	A192252M	BO4F3000	+/-FG/PWM	Ball	24	14~27.6	-10~70	5500	0.46	11.1	100.4	2.84	0.59	14.9	146	51.0
	A192252M	BO4F4000	+/-FG/PWM	Ball	24	14~27.6	-10~70	4500	0.22	5.3	81.7	2.31	0.42	10.7	104	46.5
	A192252M	BO4F5000	+/-FG/PWM	Ball	24	14~27.6	-10~70	3900	0.14	3.4	69.8	1.97	0.33	8.4	82	42.0
	A192252M	BO4F6000	+/-FG/PWM	Ball	24	14~27.6	-10~70	3500	0.10	2.5	62.6	1.77	2.75	69.8	684	38.4