


120X120X38 mm




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-FG/PWM
- Weight: 275 g
- Lead Wires : UL10368 AWG26 OR Equivalent

■ Air Flow-Static Pressure Characteristics

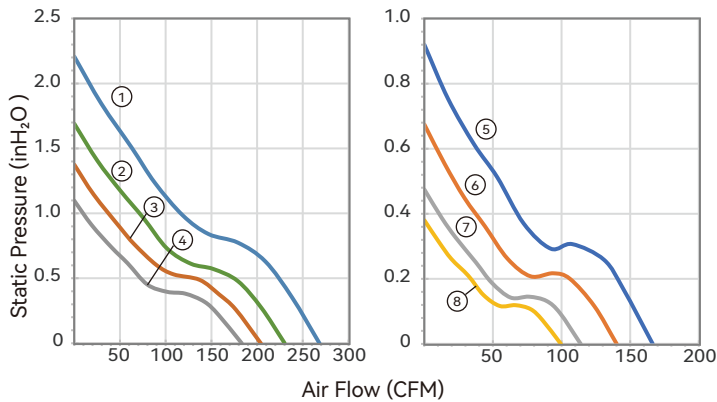

■ Dimensions Drawing (mm)

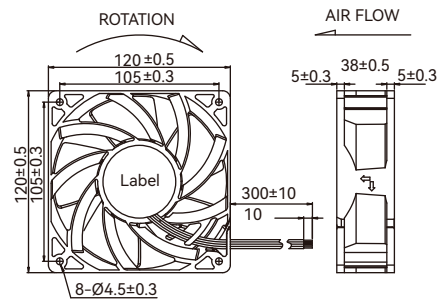

Model No.	Rated Voltage VDC	Operating Voltage Range VDC	Operating Temp. °C	Speed RPM	Input Current Amp	Input Power Watts	Maximum Air Flow		Maximum Air Pressure		Noise @1M dB(A)
							CFM	m ³ /min	inH ₂ O	mmH ₂ O	
① A112381S B40N20N0	12	6~13.2	-10~70	7400	5.91	70.87	268.20	7.59	2.21	56.13	70.2
② A112381S B40N30N0	12	6~13.2	-10~70	6400	3.50	41.94	233.20	6.60	1.68	42.67	67.0
③ A112381S B40N40N0	12	6~13.2	-10~70	5600	2.05	24.60	204.02	5.77	1.38	34.95	63.4
④ A112381H BQ4050N0	12	6~13.2	-10~70	5000	1.51	18.11	183.07	5.18	1.10	27.87	60.8
⑤ A112381H BQ4060N0	12	6~13.2	-10~70	4600	1.12	13.46	166.38	4.71	0.92	23.37	58.4
⑥ A112381H BQ4070N0	12	6~13.2	-10~70	3900	0.69	8.28	140.22	3.97	0.67	17.14	53.6
⑦ A112381H BQ4080N0	12	6~13.2	-10~70	3200	0.43	5.12	113.99	3.23	0.47	12.06	48.4
⑧ A112381H BQ4090N0	12	6~13.2	-10~70	2800	0.32	3.86	99.45	2.81	0.38	9.65	46.9
① A112382S BQ4020N0	24	21.6~26.4	-10~70	7400	2.95	70.87	268.20	7.59	2.21	56.13	70.2
② A112382S BQ4030N0	24	21.6~26.4	-10~70	6400	1.75	41.94	233.20	6.60	1.68	42.67	67.0
③ A112382H BQ4040N0	24	21.6~26.4	-10~70	5600	1.03	24.60	204.02	5.77	1.38	34.95	63.4
④ A112382H BQ4050N0	24	21.6~26.4	-10~70	5000	0.75	18.11	183.07	5.18	1.10	27.87	60.8
⑤ A112382H BQ4060N0	24	21.6~26.4	-10~70	4600	0.56	13.46	166.38	4.71	0.92	23.37	58.4
⑥ A112382H BQ4070N0	24	21.6~26.4	-10~70	3900	0.34	8.28	140.22	3.97	0.67	17.14	53.6
⑦ A112382H BQ4080N0	24	21.6~26.4	-10~70	3200	0.21	5.12	113.99	3.23	0.47	12.06	48.4
⑧ A112382H BQ4090N0	24	21.6~26.4	-10~70	2800	0.16	3.86	99.45	2.81	0.38	9.65	46.9

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.

www.i-longwin.com


Suzhou Longwin High-Tech Co., LTD

120X120X38 mm




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-FG/PWM
- Weight: 275 g
- Lead Wires : UL10368 AWG26 OR Equivalent

■ Air Flow-Static Pressure Characteristics

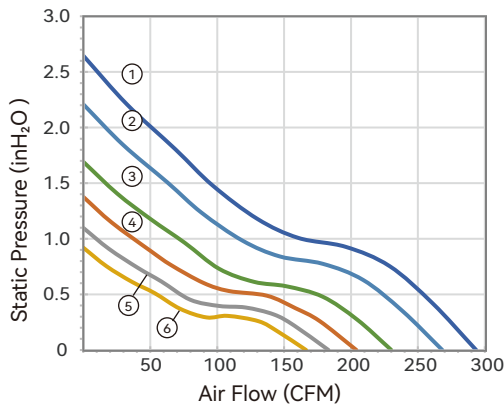

■ Dimensions Drawing (mm)

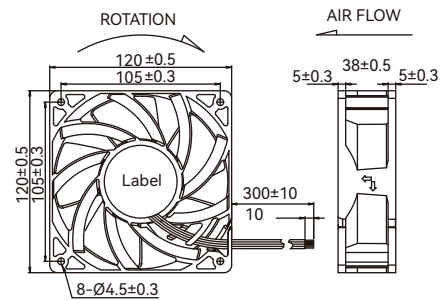

Model No.	Rated Voltage VDC	Operating Voltage Range VDC	Operating Temp. °C	Speed RPM	Input Current Amp	Input Power Watts	Maximum Air Flow		Maximum Air Pressure		Noise @1M dB(A)
							CFM	m ³ /min	inH ₂ O	mmH ₂ O	
① A112384H B40N10N0	48	36~57	-10~70	8200	1.90	91.20	300.00	8.49	2.67	67.83	72.4
② A112384H B40N20N0	48	36~57	-10~70	7400	1.48	70.87	268.20	7.59	2.21	56.13	70.2
③ A112384H B40N30N0	48	36~57	-10~70	6400	0.87	41.94	233.20	6.60	1.68	42.67	67.0
④ A112384H B40N40N0	48	36~57	-10~70	5600	0.51	24.60	204.02	5.77	1.38	34.95	63.4
⑤ A112384H B40N50N0	48	36~57	-10~70	5000	0.38	18.11	183.07	5.18	1.10	27.87	60.8
⑥ A112384H B40N60N0	48	36~57	-10~70	4600	0.28	13.46	166.38	4.71	0.92	23.37	58.4

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.

www.i-longwin.com

Suzhou Longwin High-Tech Co., LTD