


60X60X38 mm

High Static Pressure




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-FG/PWM
- Weight: 130 g
- Lead Wires : UL10368 AWG26 OR Equivalent

■ Air Flow-Static Pressure Characteristics

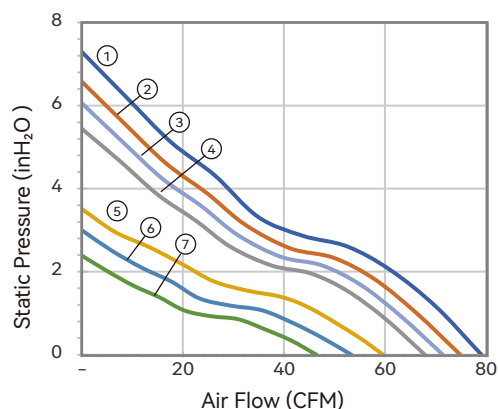

■ Dimensions Drawing (mm)

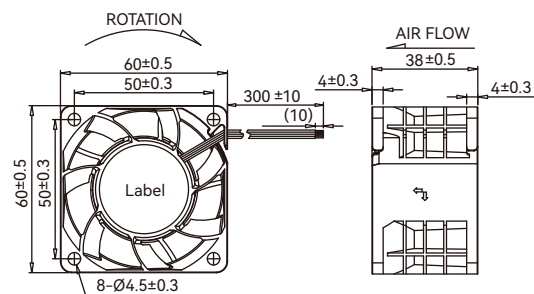

Model No.	Rated Voltage VDC	Operating Voltage Range VDC	Operating Temp. °C	Speed RPM	Input Current Amp	Input Power Watts	Maximum Air Flow		Maximum Air Pressure		Noise @1M dB(A)
							CFM	m ³ /min	inH ₂ O	mmH ₂ O	
① A360381H BO4010N0	12	7~13.8	-10~70	24000	3.05	36.60	79.10	2.24	7.30	185	72.3
② A360381H BO4020N0	12	7~13.8	-10~70	22700	2.63	31.60	74.90	2.12	6.60	167	69.1
③ A360381H BO4030N0	12	7~13.8	-10~70	21700	2.27	27.30	71.50	2.02	6.10	154	68.4
④ A360381H BO4040N0	12	7~13.8	-10~70	20600	2.20	26.40	67.90	1.92	5.40	138	66.6
⑤ A160381M B40N50N0	12	7~13.8	-10~70	18000	1.34	16.10	59.60	1.69	3.50	89	65.1
⑥ A160381M B40N60N0	12	7~13.8	-10~70	16000	1.05	12.60	53.40	1.51	3.00	76	62.4
⑦ A160381M B40N70N0	12	7~13.8	-10~70	14000	0.65	7.80	46.50	1.31	2.40	61	59.1
① A160382H BO4010N0	24	14~27.6	-10~70	24000	1.52	36.60	79.10	2.24	7.30	185	72.3
② A160382H BO4020N0	24	14~27.6	-10~70	22700	1.32	31.60	74.90	2.12	6.60	167	69.1
③ A160382H BO4030N0	24	14~27.6	-10~70	21700	1.14	27.30	71.50	2.02	6.10	154	68.4
④ A160382H BO4040N0	24	14~27.6	-10~70	20600	1.10	26.40	67.90	1.92	5.40	138	66.6
⑤ A160382H BO4050N0	24	14~27.6	-10~70	18000	0.68	16.30	59.60	1.69	3.50	89	65.1
⑥ A160382H BO4060N0	24	14~27.6	-10~70	16000	0.54	13.00	53.40	1.51	3.00	76	62.4
⑦ A160382H BO4070N0	24	14~27.6	-10~70	14000	0.33	7.80	46.50	1.31	2.40	61	59.1

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.

www.i-longwin.com

Suzhou Longwin High-Tech Co., LTD


60X60X38 mm

High Static Pressure




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 130 g
- Lead Wires : UL10368 AWG26 OR Equivalent

■ Air Flow-Static Pressure Characteristics

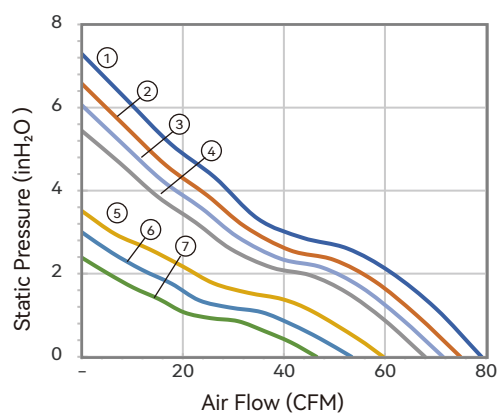

■ Dimensions Drawing (mm)

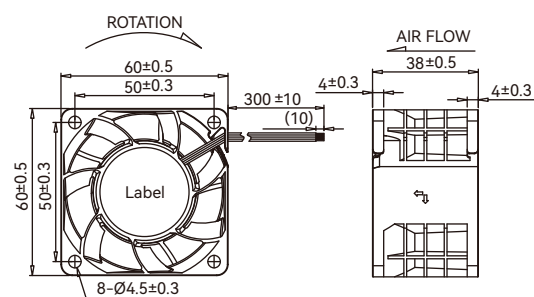

Model No.	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
							CFM	m ³ /min	inH ₂ O	mmH ₂ O	
① A160384H B40N10N0	48	36~57	-10~70	24000	0.83	39.8	79.10	2.24	7.30	185	72.3
② A160384H B40N20N0	48	36~57	-10~70	22700	0.70	33.7	74.90	2.12	6.60	167	69.1
③ A160384H B40N30N0	48	36~57	-10~70	21700	0.61	29.4	71.50	2.02	6.10	154	68.4
④ A160384H B40N40N0	48	36~57	-10~70	20600	0.52	25.0	67.90	1.92	5.40	138	66.6
⑤ A160384H B40N50N0	48	36~57	-10~70	18000	0.36	17.5	59.60	1.69	3.50	89	65.1
⑥ A160384H B40N60N0	48	36~57	-10~70	16000	0.54	12.6	53.40	1.51	3.00	76	62.4
⑦ A160384H B40N70N0	48	36~57	-10~70	14000	0.16	7.8	46.50	1.31	2.40	61	59.1

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.

www.i-longwin.com

Suzhou Longwin High-Tech Co., LTD


60X60X38 mm

High Efficiency




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-FG/PWM
- Weight: 130 g
- Lead Wires : UL10368 AWG26 OR Equivalent

■ Air Flow-Static Pressure Characteristics

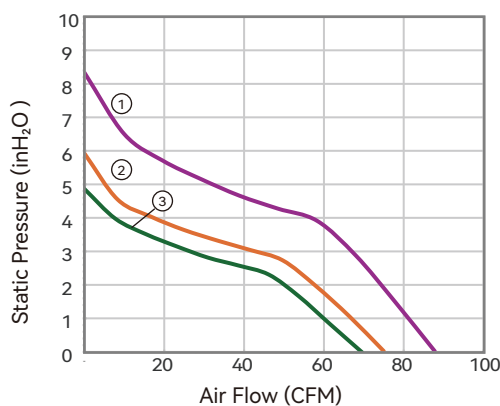

■ Dimensions Drawing

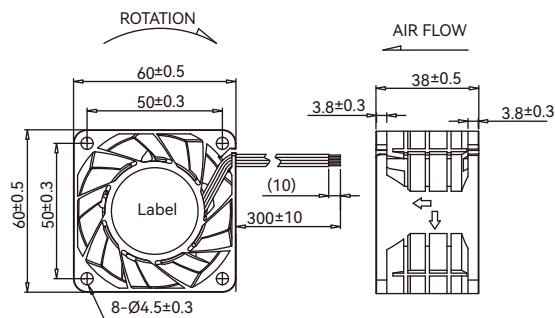

Model No.	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
							CFM	m ³ /min	inH ₂ O	mmH ₂ O	
① A360381H BO4000A0	12	10.2~13.8	-10~70	25500	3.82	45.8	87.8	2.50	8.3	212	74.1
② A360381H BO4030A0	12	10.2~13.8	-10~70	21700	2.55	30.6	75.0	2.12	5.9	150	71.4
③ A160381M B40N40A0	12	10.2~13.8	-10~70	20600	2.08	25.0	69.5	1.97	4.9	124	70.8
① A160384H B40N10A0	48	36~57	-10~70	25500	0.92	44.0	87.5	2.48	8.1	206	74.1
② A160384H B40N30A0	48	36~57	-10~70	21700	0.56	26.9	74.9	2.12	5.6	142	71.4
③ A160384H B40N40A0	48	36~57	-10~70	20600	0.48	23.3	70.7	2.00	5.1	130	70.8

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.

www.i-longwin.com

Suzhou Longwin High-Tech Co., LTD