


92X92X38 mm




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-FG/PWM
- Weight: 260 g
- Lead Wires : UL10368 AWG22 OR Equivalent

■ Air Flow-Static Pressure Characteristics

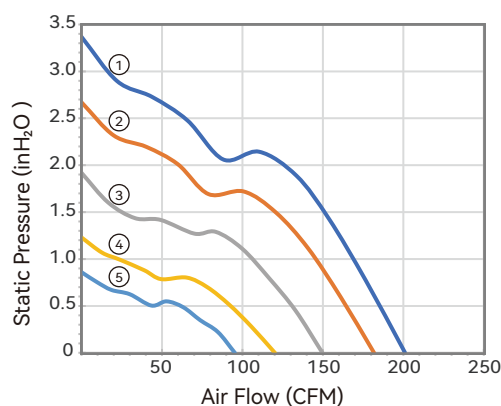

■ Dimensions Drawing (mm)

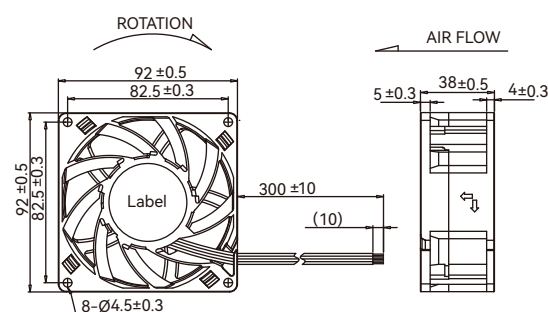

Model No.	Rated Voltage VDC	Operating Voltage Range VDC	Operating Temp. °C	Speed RPM	Input Current Amp	Input Power Watts	Maximum Air Flow		Maximum Air Pressure		Noise @1M dB(A)
							CFM	m ³ /min	inH ₂ O	mmH ₂ O	
① A392381H BQ4010	12	10.8~13.2	-10~70	13200	5.61	67.30	201.00	5.70	3.37	85.60	71.9
② A392381H BQ4020	12	10.8~13.2	-10~70	11900	4.10	49.20	181.80	5.10	2.67	67.80	69.0
③ A192381M B40N30N0	12	6.5~13.2	-10~70	10000	2.40	28.80	149.60	4.20	1.92	48.70	62.0
④ A192381M B40N40N0	12	6.5~13.2	-10~70	8000	1.17	14.00	120.20	3.40	1.23	31.20	58.2
⑤ A192381M B40N50N0	12	6.5~13.2	-10~70	6500	0.63	7.50	95.30	2.70	0.86	21.80	52.9
① A392382H B40N10N0	24	21.6~26.4	-10~70	13200	2.81	67.30	201.00	5.70	3.37	85.60	71.9
② A392382H B40N20N0	24	21.6~26.4	-10~70	11900	2.05	49.20	181.80	5.10	2.67	67.80	69.0
③ A192382M BQ4030	24	21.6~26.4	-10~70	10000	1.20	28.80	149.60	4.20	1.92	48.70	62.0
④ A192382M BQ4040	24	21.6~26.4	-10~70	8000	0.58	14.00	120.20	3.40	1.23	31.20	58.2
⑤ A192382M BQ4050	24	21.6~26.4	-10~70	6500	0.31	7.50	95.30	2.70	0.86	21.80	52.9
① A192384H B40N10N0	48	36~57	-10~70	13200	1.40	67.30	201.00	5.70	3.37	85.60	71.9
② A192384H B40N20N0	48	36~57	-10~70	11900	1.03	49.20	181.80	5.10	2.67	67.80	69.0
③ A192384H B40N30N0	48	36~57	-10~70	10000	0.60	28.80	149.60	4.20	1.92	48.70	62.0
④ A192384H B40N40N0	48	36~57	-10~70	8000	0.29	14.00	120.20	3.40	1.23	31.20	58.2
⑤ A192384H B40N50N0	48	36~57	-10~70	6500	0.16	7.50	95.30	2.70	0.86	21.80	52.9

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.

www.i-longwin.com

Suzhou Longwin High-Tech Co., LTD