


35X35X10 mm




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-FG/PWM
- Weight: 10 g

■ Air Flow-Static Pressure Characteristics

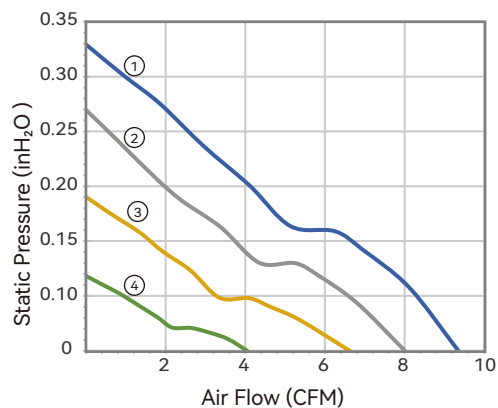

■ Dimensions Drawing (mm)

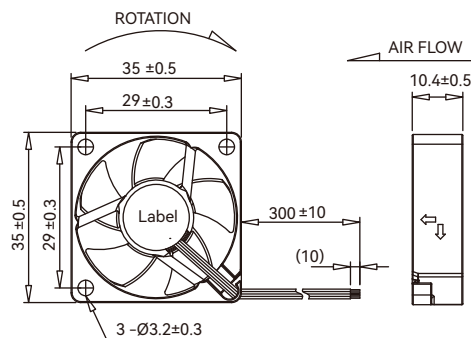

Model No.	Rated Voltage VDC	Operating Voltage Range VDC	Operating Temp. °C	Speed RPM	Input Current Amp	Input Power Watts	Maximum Air Flow		Maximum Air Pressure		Noise @1M dB(A)
							CFM	m ³ /min	inH ₂ O	mmH ₂ O	
② A135100M H40N30N0	5	4~5.5	-10~70	9500	0.233	1.16	8.01	0.23	0.22	5.58	28.0
③ A135100M H40N40N0	5	4~5.5	-10~70	7500	0.140	0.70	6.62	0.19	0.14	3.57	21.9
④ A135100M H40N50N0	5	4~5.5	-10~70	5000	0.060	0.30	4.04	0.11	0.07	1.73	15.9
① A135101M H40N20N0	12	7~13.8	-10~70	11000	0.130	1.56	9.35	0.26	0.28	7.09	32.1
② A135101M H40N30N0	12	7~13.8	-10~70	9500	0.097	1.16	8.01	0.23	0.22	5.58	28.0
③ A135101M H40N40N0	12	7~13.8	-10~70	7500	0.058	0.70	6.62	0.19	0.14	3.57	21.9
④ A135101M H40N50N0	12	7~13.8	-10~70	5000	0.025	0.30	4.04	0.11	0.07	1.73	15.9
① A135102M H40N20N0	24	14~27.6	-10~70	11000	0.065	1.56	9.35	0.26	0.28	7.09	32.1
② A135102M H40N30N0	24	14~27.6	-10~70	9000	0.035	0.85	7.59	0.21	0.20	5.01	27.1
③ A135102M H40N40N0	24	14~27.6	-10~70	7000	0.024	0.58	5.76	0.16	0.12	3.14	21.0
④ A135102M H40N50N0	24	14~27.6	-10~70	5000	0.013	0.30	4.04	0.11	0.07	1.73	15.9

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.

www.i-longwin.com

Suzhou Longwin High-Tech Co., LTD