


40X40X20 mm




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-FG/PWM
- Weight: 38.1 g

■ Air Flow-Static Pressure Characteristics

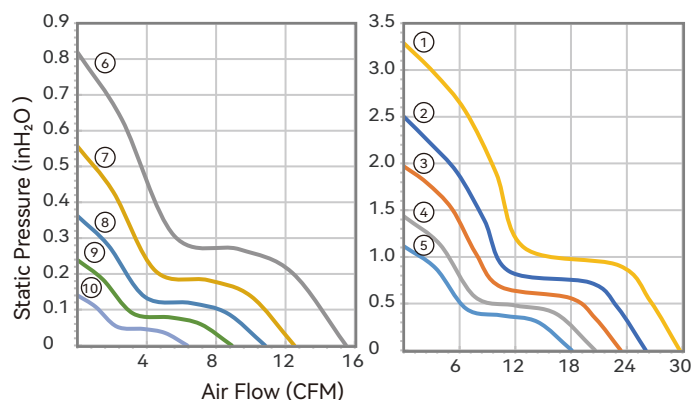

■ Dimensions drawing (mm)

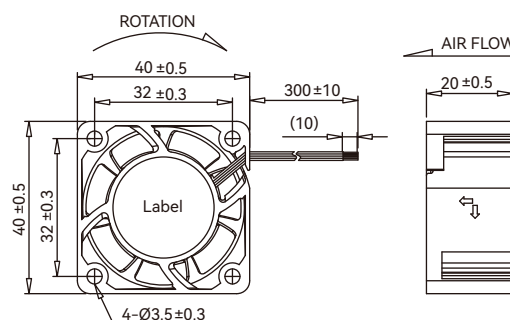

Model No.	Rated Voltage VDC	Operating Voltage Range VDC	Operating Temp. °C	Speed RPM	Input Current Amp	Input Power Watts	Maximum Air Flow		Maximum Air Pressure		Noise @1M dB(A)
							CFM	m ³ /min	inH ₂ O	mmH ₂ O	
④ A140200M B40N00N0	5	3.5~5.5	-10~70	16000	1.104	5.5	20.60	0.58	1.43	36.40	52.4
⑤ A140200M B40N10N0	5	3.5~5.5	-10~70	14000	0.672	3.4	18.10	0.51	1.11	28.30	49.0
⑥ A140200M B40N20N0	5	3.5~5.5	-10~70	12000	0.468	2.3	15.50	0.44	0.82	20.80	45.7
⑦ A140200M B40N30N0	5	3.5~5.5	-10~70	10000	0.336	1.7	12.50	0.35	0.56	14.10	39.7
⑧ A140200M B40N40N0	5	3.5~5.5	-10~70	8000	0.180	0.9	10.80	0.31	0.36	9.20	33.4
⑨ A140200M B40N50N0	5	3.5~5.5	-10~70	6500	0.125	0.6	8.90	0.25	0.24	6.10	27.8
⑩ A140200M B40N60N0	5	3.5~5.5	-10~70	5000	0.072	0.4	6.30	0.18	0.14	3.50	23.7
① A140201H BO4010	12	6~13.8	-10~70	23000	1.450	17.4	29.70	0.84	3.29	83.50	59.9
② A140201H BO4020	12	6~13.8	-10~70	20000	0.810	9.7	26.00	0.74	2.50	63.50	56.4
③ A140201H BO4030	12	6~13.8	-10~70	18000	0.620	7.4	23.30	0.66	1.97	50.00	54.2
④ A140201M BO4000	12	6~13.8	-10~70	16000	0.460	5.5	20.60	0.58	1.43	36.40	52.4
⑤ A140201M BO4010	12	6~13.8	-10~70	14000	0.280	3.4	18.10	0.51	1.11	28.30	49.0
⑥ A140201M BO4020	12	6~13.8	-10~70	12000	0.195	2.3	15.50	0.44	0.82	20.80	45.7
⑦ A140201M BO4030	12	6~13.8	-10~70	10000	0.140	1.7	12.50	0.35	0.56	14.10	39.7
⑧ A140201M BO4040	12	6~13.8	-10~70	8000	0.075	0.9	10.80	0.31	0.36	9.20	33.4
⑨ A140201M BO4050	12	6~13.8	-10~70	6500	0.052	0.6	8.90	0.25	0.24	6.10	27.8
⑩ A140201M BO4060	12	6~13.8	-10~70	5000	0.030	0.4	6.30	0.18	0.14	3.50	23.7

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.

www.i-longwin.com


Suzhou Longwin High-Tech Co., LTD

40X40X20 mm




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-FG/PWM
- Weight: 38.1 g

■ Air Flow-Static Pressure Characteristics

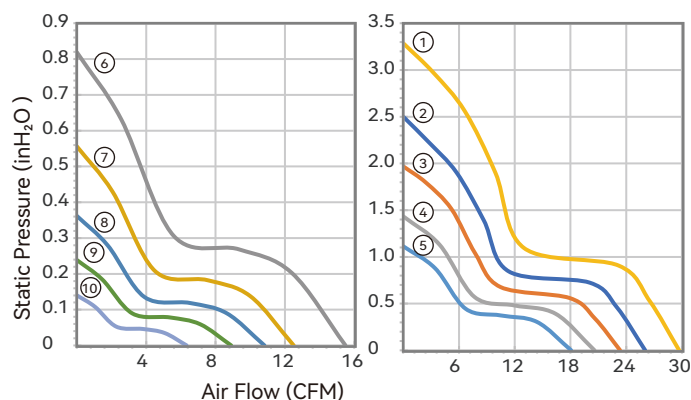

■ Dimensions drawing (mm)

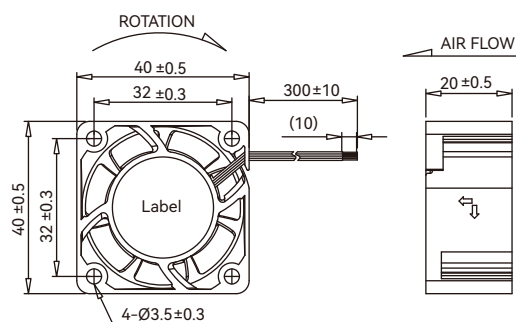

Model No.	Rated Voltage VDC	Operating Voltage Range VDC	Operating Temp. °C	Speed RPM	Input Current Amp	Input Power Watts	Maximum Air Flow		Maximum Air Pressure		Noise @1M dB(A)
							CFM	m ³ /min	inH ₂ O	mmH ₂ O	
① A140202H B40N00N0	24	14~27.6	-10~70	23000	0.725	17.4	29.70	0.84	3.29	83.50	59.9
② A140202M B40N10N0	24	14~27.6	-10~70	20000	0.405	9.7	26.00	0.74	2.50	63.50	56.4
③ A140202M B40N20N0	24	14~27.6	-10~70	18000	0.310	7.4	23.30	0.66	1.97	50.00	54.2
④ A140202M B40N30N0	24	14~27.6	-10~70	16000	0.230	5.5	20.60	0.58	1.43	36.40	52.4
⑤ A140202M B40N40N0	24	14~27.6	-10~70	14000	0.140	3.4	18.10	0.51	1.11	28.30	49.0
⑥ A140202M B40N50N0	24	14~27.6	-10~70	12000	0.098	2.3	15.50	0.44	0.82	20.80	45.7
⑦ A140202M B40N60N0	24	14~27.6	-10~70	10000	0.070	1.7	12.50	0.35	0.56	14.10	39.7
⑧ A140202M B40N70N0	24	14~27.6	-10~70	8000	0.038	0.9	10.80	0.31	0.36	9.20	33.4
⑨ A140202M B40N80N0	24	14~27.6	-10~70	6500	0.026	0.6	8.90	0.25	0.24	6.10	27.8
⑩ A140202M B40N90N0	24	14~27.6	-10~70	5000	0.015	0.4	6.30	0.18	0.14	3.50	23.7

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.

www.i-longwin.com


Suzhou Longwin High-Tech Co., LTD

40X40X20 mm




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-FG/PWM
- Weight: 36.8 g

■ Air Flow-Static Pressure Characteristics

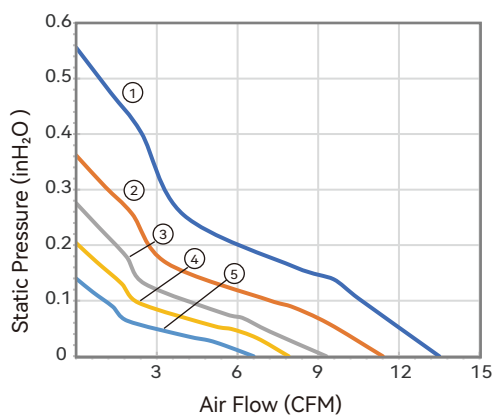

■ Dimensions drawing (mm)

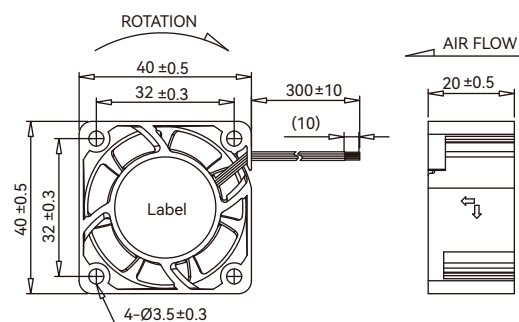

Model No.	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
							CFM	m ³ /min	inH ₂ O	mmH ₂ O	
② A140200M H40N40N0	5	3.5~6	-10~70	8000	0.408	2.04	11.4	0.323	0.36	9.2	33.6
③ A140200M H40N50N0	5	3.5~6	-10~70	7000	0.336	1.68	9.3	0.271	0.28	7.0	29.5
④ A140200M H40N60N0	5	3.5~6	-10~70	6000	0.300	1.50	7.9	0.232	0.20	5.2	24.9
⑤ A140200M H40N70N0	5	3.5~6	-10~70	5000	0.204	1.02	6.6	0.194	0.14	3.5	19.5
① A140201M HO4030	12	6~13.8	-10~70	10000	0.322	3.87	13.5	0.383	0.56	14.1	39.5
② A140201M HO4040	12	6~13.8	-10~70	8000	0.170	2.04	11.4	0.323	0.36	9.2	33.6
③ A140201M HO4050	12	6~13.8	-10~70	7000	0.140	1.68	9.3	0.271	0.28	7.0	29.5
④ A140201M HO4060	12	6~13.8	-10~70	6000	0.125	1.50	7.9	0.232	0.20	5.2	24.9
⑤ A140201M HO4070	12	6~13.8	-10~70	5000	0.085	1.02	6.6	0.194	0.14	3.5	19.5
① A140202M H40N30N0	24	14~27.6	-10~70	10000	0.161	3.87	13.5	0.383	0.56	14.1	39.5
② A140202M H40N40N0	24	14~27.6	-10~70	8000	0.085	2.04	11.4	0.323	0.36	9.2	33.6
③ A140202M H40N50N0	24	14~27.6	-10~70	7000	0.070	1.68	9.3	0.271	0.28	7.0	29.5
④ A140202M H40N60N0	24	14~27.6	-10~70	6000	0.063	1.50	7.9	0.232	0.20	5.2	24.9
⑤ A140202M H40N70N0	24	14~27.6	-10~70	5000	0.043	1.02	6.6	0.194	0.14	3.5	19.5

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.

www.i-longwin.com

Suzhou Longwin High-Tech Co., LTD