


17X17X3 mm




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-FG/PWM
- Weight: 1.09 g

■ Air Flow-Static Pressure Characteristics

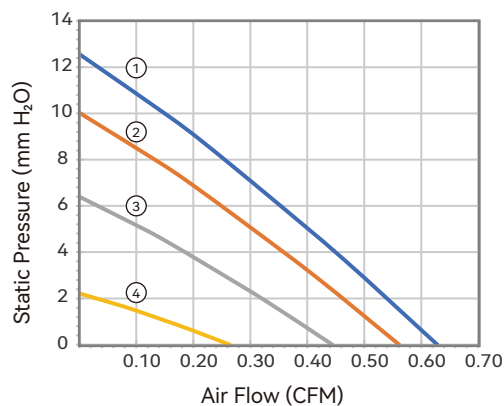


■ Dimensions Drawing (mm)

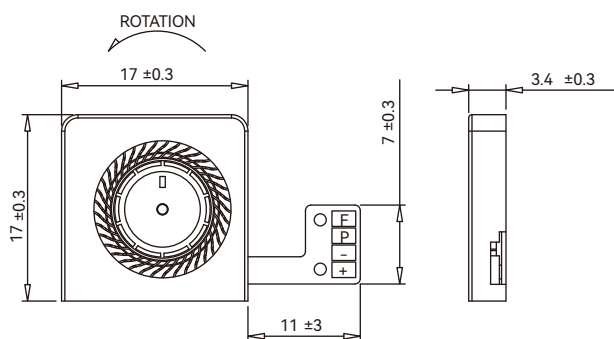

Model No.	Rated Voltage VDC	Operating Voltage Range VDC	Operating Temp. °C	Speed RPM	Input Current Amp	Input Power Watts	Maximum Air Flow		Maximum Air Pressure		Noise @30cm dB(A)
							CFM	l/min	Pa	mmH ₂ O	
① M1B1733H HQ4010	3	2.5~3.5	-10~60	20600	0.250	0.75	0.44	12.40	122.5	12.49	40.0
② M1B1733H HQ4020	3	2.5~3.5	-10~60	16700	0.160	0.48	0.36	10.05	80.5	8.21	35.6
③ M1B1733H HQ4030	3	2.5~3.5	-10~60	12100	0.095	0.29	0.26	7.28	45.6	4.65	26.5
④ M1B1733H HQ4040	3	2.5~3.5	-10~60	7600	0.043	0.13	0.16	4.58	16.7	1.70	19.4

■ 20% Duty Speed Sound Quality Spectrum

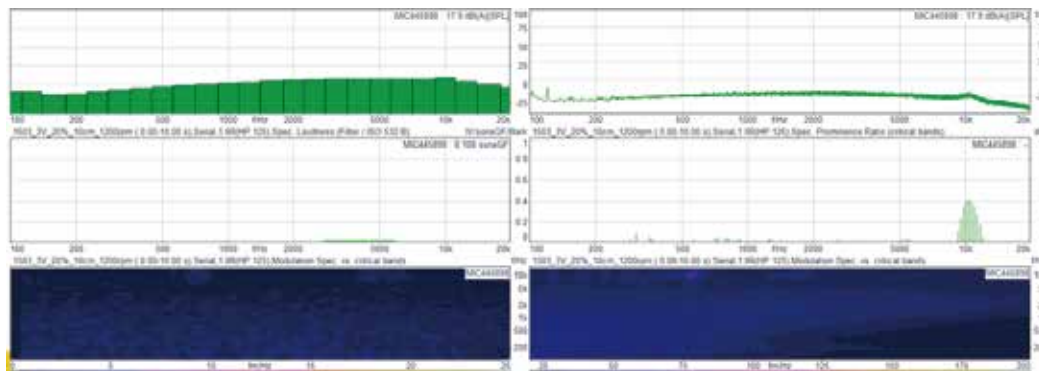

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.

www.i-longwin.com

Suzhou Longwin High-Tech Co., LTD