


20X20X3 mm




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-FG/PWM
- Weight: 1.18 g

■ Air Flow-Static Pressure Characteristics

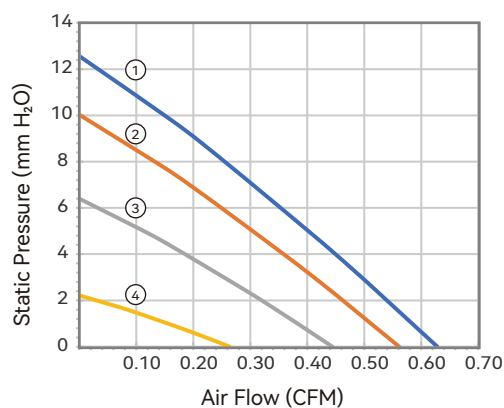


■ Dimensions Drawing (mm)

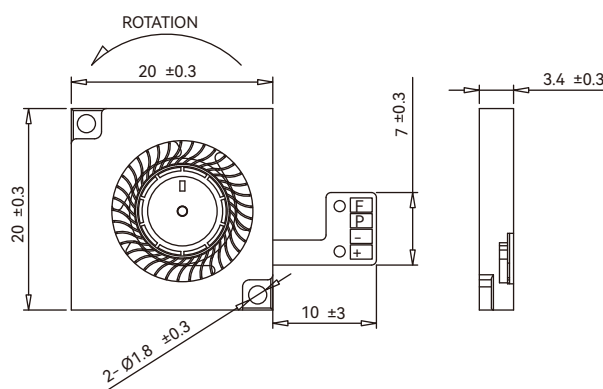

Model No.	Rated Voltage VDC	Operating Voltage Range VDC	Operating Temp. °C	Speed RPM	Input Current Amp	Input Power Watts	Maximum Air Flow		Maximum Air Pressure		Noise @30cm dB(A)
							CFM	l/min	Pa	mmH ₂ O	
① M1B2033H HQ4010	3	2.5~3.5	-10~60	15000	0.250	0.750	0.63	17.78	123.2	12.56	36.7
② M1B2033H HQ4020	3	2.5~3.5	-10~60	13400	0.160	0.480	0.56	15.89	98.3	10.03	34.3
③ M1B2033H HQ4030	3	2.5~3.5	-10~60	10600	0.096	0.288	0.44	12.57	62.8	6.40	29.5
④ M1B2033H HQ4040	3	2.5~3.5	-10~60	6300	0.045	0.135	0.26	7.47	21.7	2.22	18.8

■ 20% Duty Speed Sound Quality Spectrum

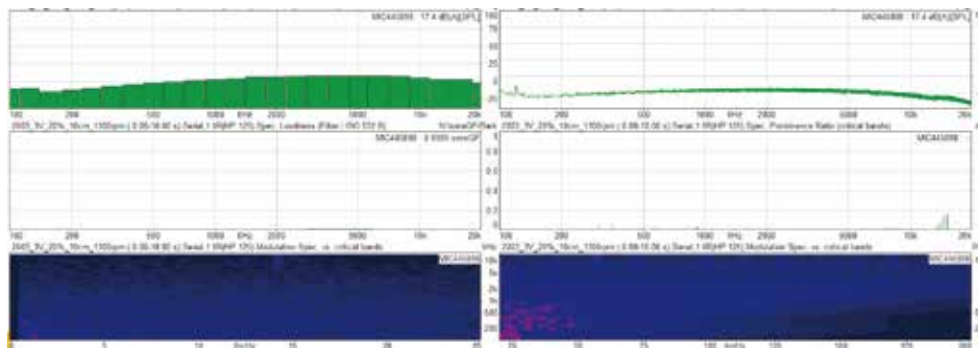

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.

www.i-longwin.com

Suzhou Longwin High-Tech Co., LTD