


20X20X5 mm




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-/FG/PWM
- Weight: 1.35 g

■ Air Flow-Static Pressure Characteristics

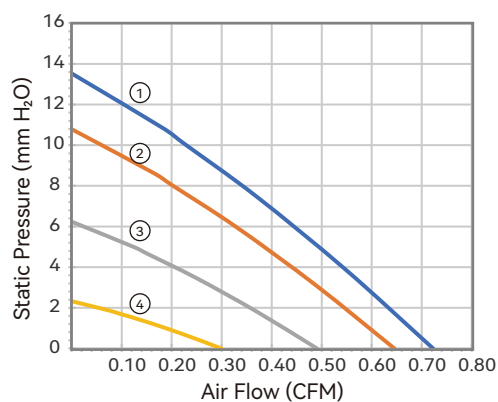


■ Dimensions Drawing (mm)

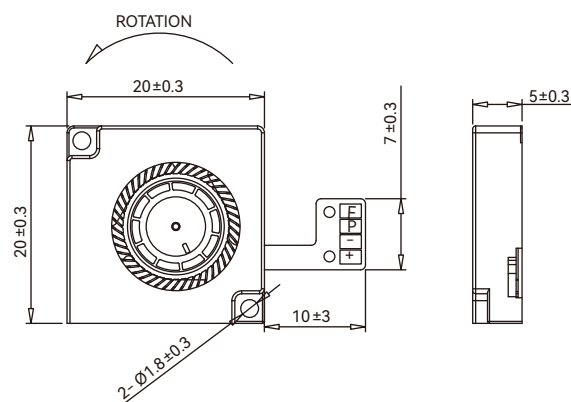

Model No.	Rated Voltage VDC	Operating Voltage Range VDC	Operating Temp. °C	Speed RPM	Input Current Amp	Input Power Watts	Maximum Air Flow		Maximum Air Pressure		Noise @30cm dB(A)
							CFM	l/min	Pa	mmH ₂ O	
① M1B2053H H40N10N0	3	2.5~3.5	-10~60	14000	0.250	0.750	0.72	20.47	132.7	13.53	35.6
② M1B2053H H40N20N0	3	2.5~3.5	-10~60	12500	0.160	0.480	0.65	18.27	105.8	10.79	33.2
③ M1B2053H H40N30N0	3	2.5~3.5	-10~60	9500	0.096	0.288	0.49	13.89	61.1	6.23	27.6
④ M1B2053H H40N40N0	3	2.5~3.5	-10~60	5800	0.045	0.135	0.30	8.48	22.8	2.32	17.4

■ 20% Duty Speed Sound Quality Spectrum

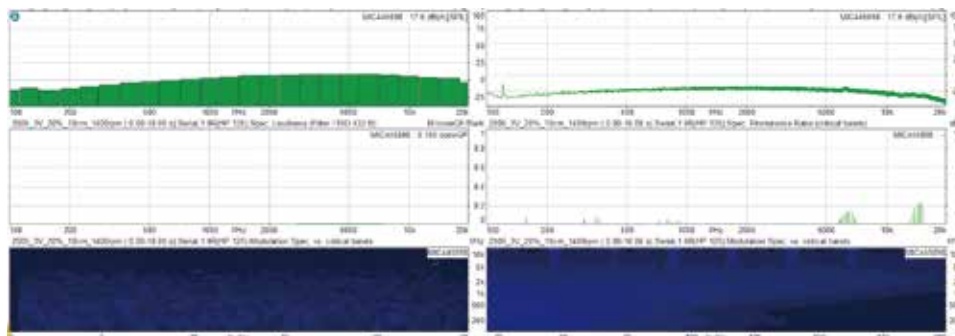

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.

www.i-longwin.com

Suzhou Longwin High-Tech Co., LTD