


30X30X3 mm




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-FG/PWM
- Weight: 3.45 g

■ Air Flow-Static Pressure Characteristics

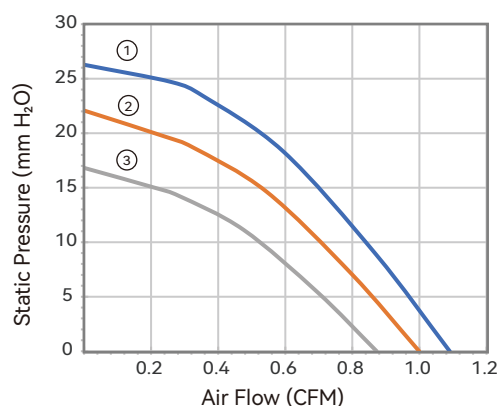


■ Dimensions Drawing (mm)

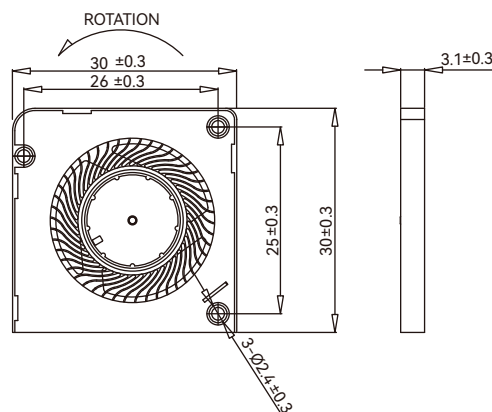

Model No.	Rated Voltage VDC	Operating Voltage Range VDC	Operating Temp. °C	Speed RPM	Input Current Amp	Input Power Watts	Maximum Air Flow		Maximum Air Pressure		Noise @30cm dB(A)
							CFM	l/min	Pa	mmH ₂ O	
① M1B3030H H40N10N0	5	3.5~5.5	-10~60	12200	0.37	1.86	1.09	30.87	258	26.3	30.1
② M1B3030H H40N20N0	5	3.5~5.5	-10~60	11000	0.26	1.30	1.00	28.29	216	22.1	28.3
③ M1B3030H H40N30N0	5	3.5~5.5	-10~60	9600	0.18	0.91	0.87	24.69	165	16.8	25.0

■ 20% Duty Speed Sound Quality Spectrum

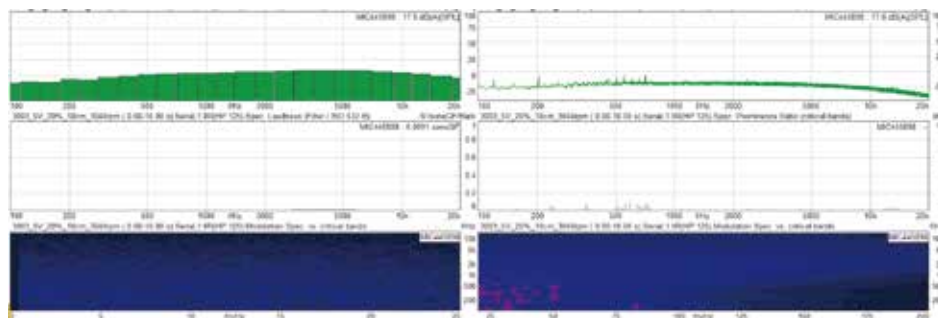

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.

www.i-longwin.com

Suzhou Longwin High-Tech Co., LTD