


35X35X5 mm




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Hydraulic bearings
- Control Options: +/-/FG/PWM
- Weight: 7.5 g

■ Air Flow-Static Pressure Characteristics

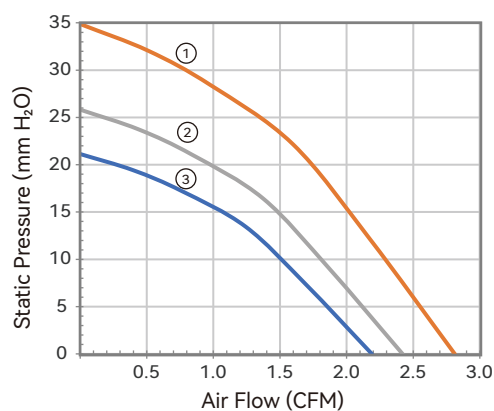

■ Dimensions Drawing (mm)

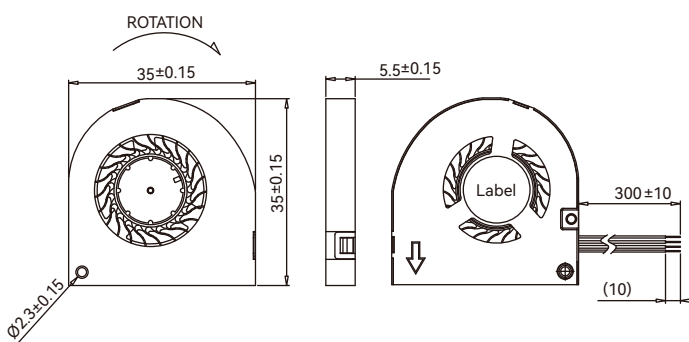

Model No.	Rated Voltage VDC	Operating Voltage Range VDC	Operating Temp. °C	Speed RPM	Input Current Amp	Input Power Watts	Maximum Air Flow		Maximum Air Pressure		Noise @1M dB(A)
							CFM	l/min	Pa	mmH ₂ O	
① M3B3550H HQ4010	5	3.5~5.5	-10~60	12200	0.36	1.80	2.81	79.62	342	34.9	42.1
② M3B3550H HQ4020	5	3.5~5.5	-10~60	10500	0.19	0.97	2.42	68.53	253	25.8	37.6
③ M3B3550H HQ4030	5	3.5~5.5	-10~60	9500	0.14	0.69	2.19	62.00	207	21.1	34.4