

DC Brushless Fan

120X120X25 mm

for Salt Spray Environment
12V


iSALT Fan Series
RoHS compliant

IEC 60068-2-52 standard




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 203 g
- Lead Wires : UL10368 AWG22 OR Equivalent

■ Air Flow-Static Pressure Characteristics

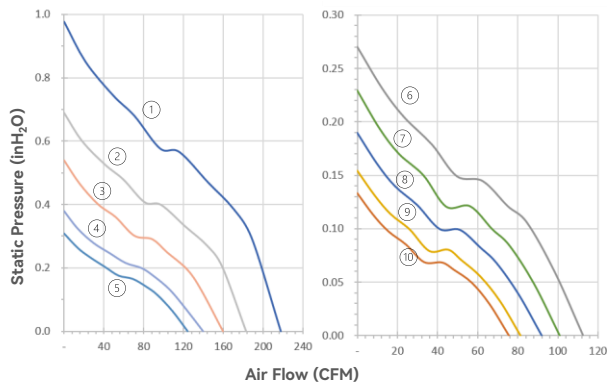

■ Dimensions drawing (mm)

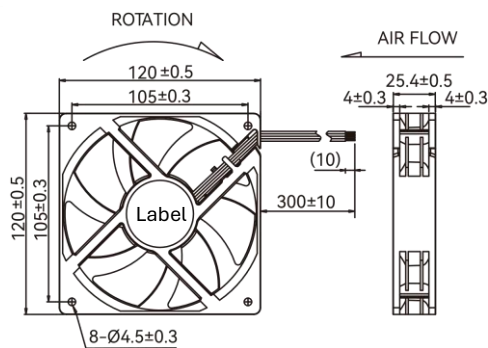

	Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
			VDC	VDC	°C	RPM	Amp	Watt	CFM	m³/min	inH₂O	mmH₂O	dB(A)
②	A112251M	BO4G10N0	12	6~13.8	-10~70	4700	1.305	15.66	182.7	5.2	0.69	17.5	57.2
③	A112251M	BO4G20N0	12	6~13.8	-10~70	4300	1.040	12.48	159.7	4.5	0.54	13.7	54.2
④	A112251M	BO4G30N0	12	6~13.8	-10~70	3800	0.667	8.00	139.2	3.9	0.38	9.6	51.0
⑤	A112251L	B4GN40N0	12	6~13.8	-10~70	3400	0.480	5.76	124.2	3.5	0.31	7.8	48.7
⑥	A112251L	B4GN50N0	12	6~13.8	-10~70	3100	0.378	4.53	112.4	3.2	0.27	6.9	46.1
⑦	A112251L	B4GN60N0	12	6~13.8	-10~70	2800	0.273	3.28	100.8	2.9	0.23	5.8	42.5
⑧	A112251L	B4GN70N0	12	6~13.8	-10~70	2500	0.230	2.76	92.0	2.6	0.19	4.8	39.3
⑨	A112251L	B4GN80N0	12	6~13.8	-10~70	2200	0.169	2.03	81.2	2.3	0.15	3.9	35.7
⑩	A112251L	B4GN90N0	12	6~13.8	-10~70	2050	0.143	1.72	75.4	2.1	0.13	3.4	33.7

* All models are available with GR487 customization options; please contact Suzhou Longwin sales for details.

DC Brushless Fan

120X120X25 mm


for Salt Spray Environment
24V

iSALT Fan Series
RoHS compliant
IEC 60068-2-52 standard




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 203 g
- Lead Wires : UL10368 AWG22 OR Equivalent

■ Air Flow-Static Pressure Characteristics

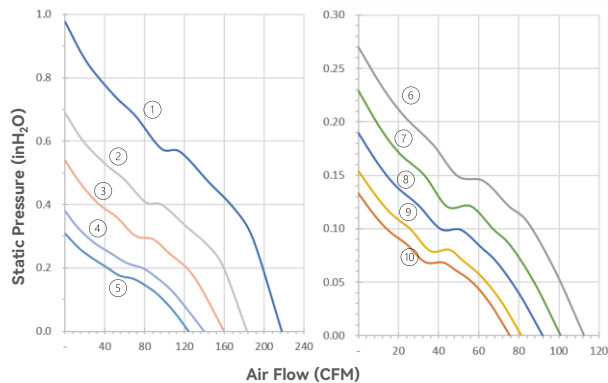

■ Dimensions drawing (mm)

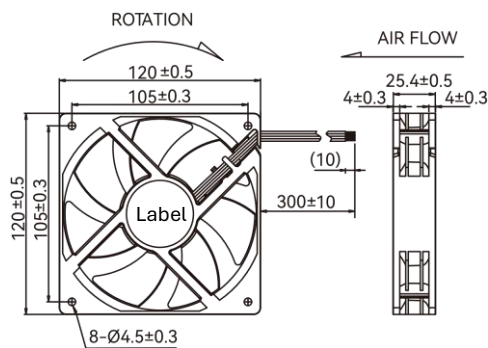

Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
①	A112252M B4GN00N0	24	14~27.6	-10~70	5600	1.104	26.49	217.7	6.2	0.98	24.8	60.6
②	A112252M B4GN10N0	24	14~27.6	-10~70	4700	0.653	15.66	182.7	4.5	0.69	13.7	54.2
③	A112252M B4GN20N0	24	14~27.6	-10~70	4300	0.520	12.48	159.7	3.9	0.54	9.6	51.0
④	A112252L B4GN30N0	24	14~27.6	-10~70	3800	0.333	8.00	139.2	3.5	0.38	7.8	48.7
⑤	A112252L B4GN40N0	24	14~27.6	-10~70	3400	0.240	5.76	124.2	3.2	0.31	6.9	46.1
⑥	A112252L B4GN50N0	24	14~27.6	-10~70	3100	0.189	4.53	112.4	2.9	0.27	5.8	42.5
⑦	A112252L B4GN60N0	24	14~27.6	-10~70	2800	0.136	3.28	100.8	2.6	0.23	4.8	39.3
⑧	A112252L B4GN70N0	24	14~27.6	-10~70	2500	0.115	2.76	92.0	2.6	0.19	4.8	39.3
⑨	A112252L B4GN80N0	24	14~27.6	-10~70	2200	0.084	2.03	81.2	2.3	0.15	3.9	35.7
⑩	A112252L B4GN90N0	24	14~27.6	-10~70	2050	0.072	1.72	75.4	2.1	0.13	3.4	33.7

* All models are available with GR487 customization options; please contact Suzhou Longwin sales for details.