

DC Brushless Fan

120X120X38 mm


for Salt Spray Environment

iSALT Fan Series
RoHS compliant
IEC 60068-2-52 standard




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 342g
- Lead Wires : UL10368 AWG22 OR Equivalent

■ Air Flow-Static Pressure Characteristics

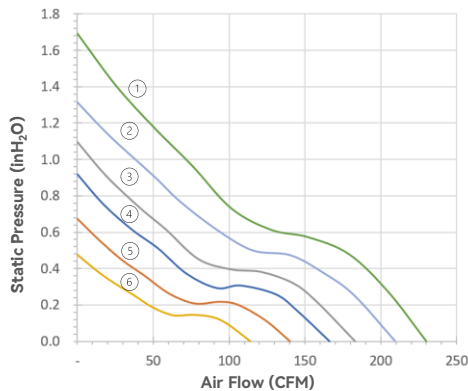

■ Dimensions drawing (mm)

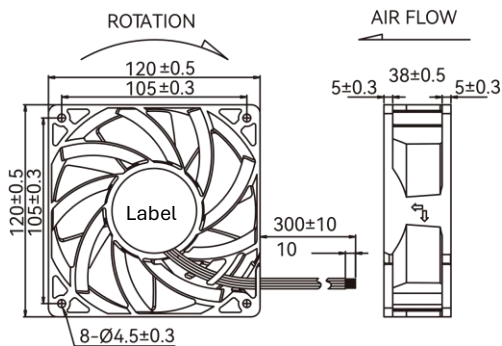

Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C	RPM	Amp	Watt	CFM	m³/min	inH₂O	mmH₂O	dB(A)
④	A112381H BQ4G60N0	12	7~13.8	-10~70	4600	1.33	15.9	166.4	4.7	0.92	23.4	58.4
⑤	A112381H BQ4G70N0	12	7~13.8	-10~70	3900	0.81	9.7	140.2	4.0	0.67	17.1	53.6
⑥	A112381H BQ4G80N0	12	7~13.8	-10~70	3200	0.45	5.4	114.0	3.2	0.47	12.1	48.4
①	A112382S BQ4G30N0	24	14~27.6	-10~70	6400	1.87	44.9	233.2	6.6	1.68	42.8	67.0
②	A112382H BQ4G40N0	24	14~27.6	-10~70	5800	1.33	31.9	209.2	5.9	1.40	35.5	64.2
③	A112382H BQ4G50N0	24	14~27.6	-10~70	5000	0.90	21.6	183.1	5.2	1.10	27.9	60.8
④	A112382H BQ4G60N0	24	14~27.6	-10~70	4600	0.66	15.9	166.4	4.7	0.92	23.4	58.4
⑤	A112382H BQ4G70N0	24	14~27.6	-10~70	3900	0.40	9.7	140.2	4.0	0.67	17.1	53.6
⑥	A112382H BQ4G80N0	24	14~27.6	-10~70	3200	0.22	5.4	114.0	3.2	0.47	12.1	48.4

* All models are available with GR487 customization options; please contact Suzhou Longwin sales for details.

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
www.i-longwin.com
Suzhou Longwin High-Tech Co., LTD