

DC Brushless Fan

40X40X20 mm


for Salt Spray Environment

iSALT Fan Series
RoHS compliant
IEC 60068-2-52 standard




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 39.3 g
- Lead Wires : UL10368 AWG26 OR Equivalent

■ Air Flow-Static Pressure Characteristics

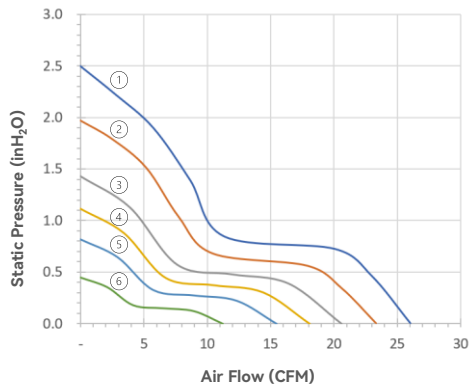

■ Dimensions drawing (mm)

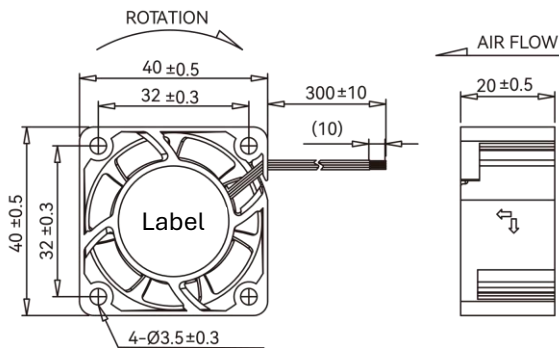

Model No.			Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
			VDC	VDC	℃	RPM	Amp	Watt	CFM	m³/min	inH₂O	mmH₂O	dB(A)
①	A140201H	BO4G20	12	6~13.8	-10~70	20000	1.20	14.4	26.0	0.74	2.50	63.5	56.4
②	A140201H	BO4G30	12	6~13.8	-10~70	18000	0.72	8.6	23.3	0.66	1.97	50.0	54.2
③	A140201M	BO4G00	12	6~13.8	-10~70	16000	0.51	6.1	20.6	0.58	1.43	36.4	52.4
④	A140201M	BO4G10	12	6~13.8	-10~70	14000	0.32	3.8	18.1	0.51	1.11	28.3	49.0
⑤	A140201M	BO4G20	12	6~13.8	-10~70	12000	0.22	2.6	15.5	0.44	0.82	20.8	45.7
⑥	A140201M	BO4F30	12	6~13.8	-10~70	9000	0.10	1.1	11.3	0.32	0.45	11.4	37.4

* All models are available with GR487 customization options; please contact Suzhou Longwin sales for details.

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
www.i-longwin.com
Suzhou Longwin High-Tech Co., LTD