

DC Brushless Fan

40X40X28 mm

for Salt Spray Environment


iSALT Fan Series
RoHS compliant

IEC 60068-2-52 standard




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 52.4g
- Lead Wires : UL10368 AWG26 OR Equivalent

■ Air Flow-Static Pressure Characteristics

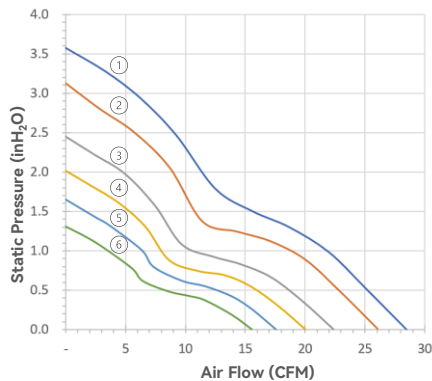

■ Dimensions drawing (mm)

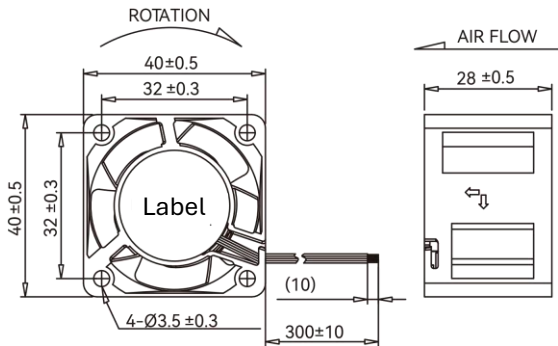

Model No.			Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
			VDC	VDC	°C	RPM	Amp	Watt	CFM	m³/min	inH₂O	mmH₂O	dB(A)
①	A140281M	BO4G10	12	6~13.8	-10~70	25000	1.31	15.7	28.5	0.81	3.6	90.9	57.3
②	A140281M	BO4G20	12	6~13.8	-10~70	23000	1.00	12.0	26.0	0.74	3.1	79.4	55.5
③	A140281M	BO4G30	12	6~13.8	-10~70	20000	0.59	7.0	22.4	0.63	2.5	62.3	52.5
④	A140281L	BG4G00	12	6~13.8	-10~70	18000	0.43	5.1	20.0	0.57	2.0	51.3	50.2
⑤	A140281L	BG4G10	12	6~13.8	-10~70	16000	0.30	3.6	17.6	0.50	1.7	42.0	48.2
⑥	A140281L	BG4G20	12	6~13.8	-10~70	14200	0.20	2.4	15.5	0.44	1.3	33.2	44.2
①	A140282L	B4GN30H0	24	14~27.6	-10~70	25000	0.65	15.7	28.5	0.81	3.6	90.9	57.3
②	A140282L	B4GN40H0	24	14~27.6	-10~70	23000	0.50	12.0	26.0	0.74	3.1	79.4	55.5
③	A140282L	B4GN50H0	24	14~27.6	-10~70	20000	0.29	7.0	22.4	0.63	2.5	62.3	52.5
④	A140282L	B4GN60H0	24	14~27.6	-10~70	18000	0.21	5.1	20.0	0.57	2.0	51.3	50.2
⑤	A140282L	B4GN70H0	24	14~27.6	-10~70	16000	0.15	3.6	17.6	0.50	1.7	42.0	48.2
⑥	A140282L	B4GN80H0	24	14~27.6	-10~70	14200	0.10	2.4	15.5	0.44	1.3	33.2	44.2

* All models are available with GR487 customization options; please contact Suzhou Longwin sales for details.

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
www.i-longwin.com
Suzhou Longwin High-Tech Co., LTD