

DC Brushless Fan

50X50X15 mm

for Salt Spray Environment


iSALT Fan Series
RoHS compliant

IEC 60068-2-52 standard




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 35.3g
- Lead Wires : UL10368 AWG26 OR Equivalent

■ Air Flow-Static Pressure Characteristics

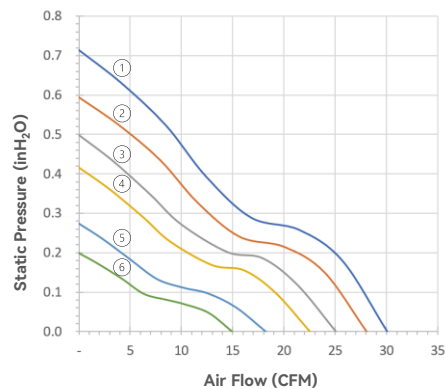

■ Dimensions drawing (mm)

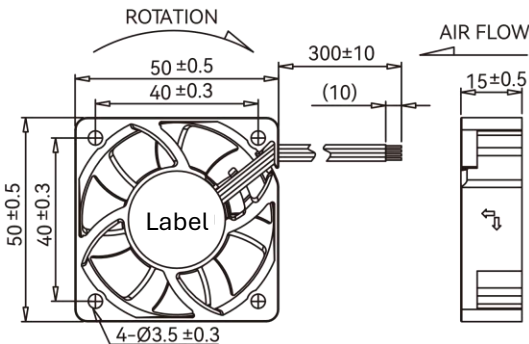

Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M	
		VDC	VDC	℃	RPM	Amp	Watt	CFM	m³/min	inH₂O	mmH₂O	dB(A)	
①	A150151M	BO4G10	12	6~13.8	-10~70	11000	0.440	5.3	30.0	0.85	0.71	18.1	49.6
②	A150151M	BO4G20	12	6~13.8	-10~70	10000	0.323	3.9	28.0	0.79	0.59	15.1	47.5
③	A150151M	BO4G30	12	6~13.8	-10~70	9000	0.238	2.9	25.1	0.71	0.50	12.6	45.2
④	A150151M	BO4G40	12	6~13.8	-10~70	8200	0.160	1.9	22.6	0.64	0.42	10.6	41.9
⑤	A150151M	BO4G50	12	6~13.8	-10~70	6500	0.116	1.4	18.2	0.52	0.27	7.0	34.7
⑥	A150151M	BO4G60	12	6~13.8	-10~70	5500	0.102	1.2	15.0	0.42	0.20	5.1	30.3
①	A150152M	B4GN10N0	24	14~27.6	-10~70	11000	0.220	5.3	30.0	0.85	0.71	18.1	49.6
②	A150152M	B4GN20N0	24	14~27.6	-10~70	10000	0.161	3.9	28.0	0.79	0.59	15.1	47.5
③	A150152M	B4GN30N0	24	14~27.6	-10~70	9000	0.119	2.9	25.1	0.71	0.50	12.6	45.2
④	A150152M	B4GN40N0	24	14~27.6	-10~70	8200	0.080	1.9	22.6	0.64	0.42	10.6	41.9
⑤	A150152M	B4GN50N0	24	14~27.6	-10~70	6500	0.058	1.4	18.2	0.52	0.27	7.0	34.7
⑥	A150152M	B4GN60N0	24	14~27.6	-10~70	5500	0.051	1.2	15.0	0.42	0.20	5.1	30.3

* All models are available with GR487 customization options; please contact Suzhou Longwin sales for details.

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
www.i-longwin.com
Suzhou Longwin High-Tech Co., LTD