

DC Brushless Fan

60X60X25 mm


for Salt Spray Environment

iSALT Fan Series
RoHS compliant
IEC 60068-2-52 standard




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 75.3g
- Lead Wires : UL10368 AWG26 OR Equivalent

■ Air Flow-Static Pressure Characteristics

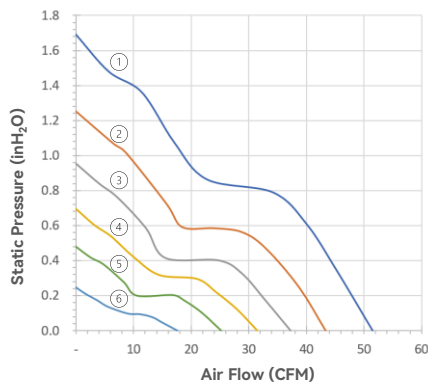

■ Dimensions drawing (mm)

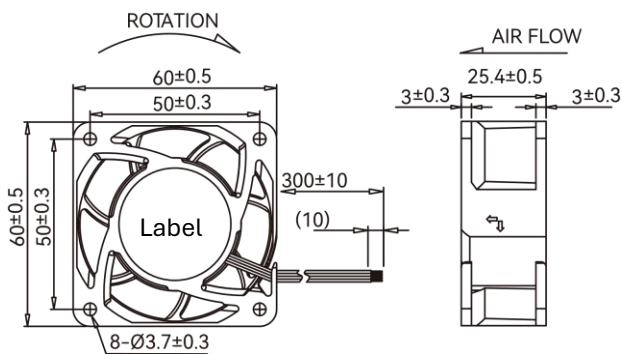

Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
①	A160251H BO4G10P0	12	6~13.8	-10~70	13000	1.15	13.8	53.08	1.50	1.70	43.18	55.8
②	A160251H BO4G20P0	12	6~13.8	-10~70	11000	0.70	8.4	43.24	1.22	1.22	30.92	52.7
③	A160251H BO4G30P0	12	6~13.8	-10~70	9500	0.46	5.5	37.33	1.06	0.95	24.25	48.6
④	A160251M BO4G40P0	12	6~13.8	-10~70	8000	0.22	2.6	31.48	0.89	0.70	17.67	44.2
⑤	A160251M BO4G50P0	12	6~13.8	-10~70	6500	0.19	2.3	25.24	0.71	0.48	12.18	38.9
⑥	A160251M BO4G60P0	12	6~13.8	-10~70	4500	0.07	0.9	17.63	0.50	0.25	6.29	29.4
①	A160252H B4GN10P0	24	14~27.6	-10~70	13000	0.58	13.8	53.08	1.50	1.70	43.18	55.8
②	A160252M B4GN20P0	24	14~27.6	-10~70	11000	0.35	8.4	43.24	1.22	1.22	30.92	52.7
③	A160252M B4GN30P0	24	14~27.6	-10~70	9500	0.23	5.5	37.33	1.06	0.95	24.25	48.6
④	A160252M B4GN40P0	24	14~27.6	-10~70	8000	0.11	2.6	31.48	0.89	0.70	17.67	44.2
⑤	A160252M B4GN50P0	24	14~27.6	-10~70	6500	0.10	2.3	25.24	0.71	0.48	12.18	38.9
⑥	A160252M B4GN60P0	24	14~27.6	-10~70	4500	0.04	0.9	17.63	0.50	0.25	6.29	29.4

* All models are available with GR487 customization options; please contact Suzhou Longwin sales for details.

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
www.i-longwin.com
Suzhou Longwin High-Tech Co., LTD