

DC Brushless Fan

60X60X38 mm

for Salt Spray Environment


iSALT Fan Series
RoHS compliant

IEC 60068-2-52 standard




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 148 g
- Lead Wires : UL10368 AWG22 OR Equivalent

■ Air Flow-Static Pressure Characteristics

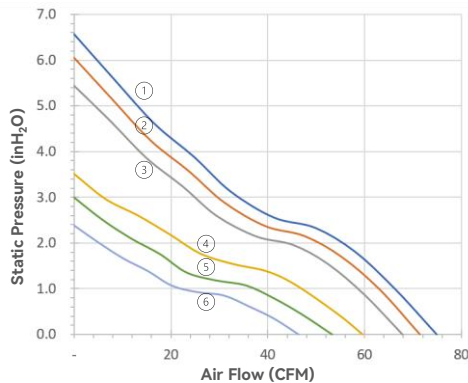

■ Dimensions drawing (mm)

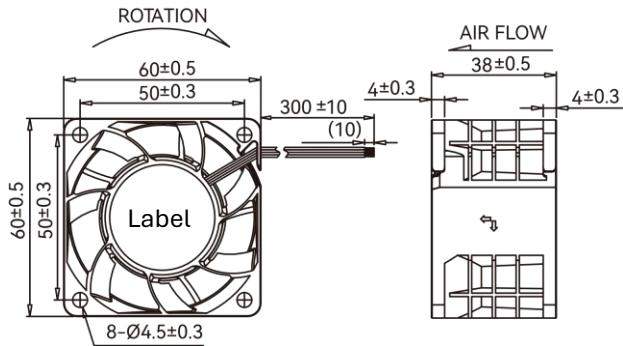

Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
①	A360381H BO4G20N0	12	10~13.8	-10~70	22700	3.16	37.9	73.5	2.08	7.0	177.2	70.6
②	A360381H BO4G30N0	12	10~13.8	-10~70	21700	2.73	32.7	70.1	1.98	6.3	161.3	68.8
③	A360381H BO4G40N0	12	10~13.8	-10~70	20600	2.64	31.7	66.2	1.87	5.9	149.4	67.7
④	A160381M B4GN50N0	12	6~13.8	-10~70	18000	1.61	19.3	60.0	1.70	3.9	98.6	65.1
⑤	A160381M B4GN60N0	12	6~13.8	-10~70	16000	1.26	15.1	53.4	1.51	2.9	73.6	62.4
⑥	A160381M B4GN70N0	12	6~13.8	-10~70	14000	0.78	9.4	46.2	1.31	2.6	65.8	59.1
①	A160382H BO4G20N0	24	14~27.6	-10~70	22700	1.58	37.9	73.5	2.08	7.0	177.2	70.6
②	A160382H BO4G30N0	24	14~27.6	-10~70	21700	1.36	32.7	70.1	1.98	6.3	161.3	68.8
③	A160382H BO4G40N0	24	14~27.6	-10~70	20600	1.32	31.7	66.2	1.87	5.9	149.4	67.7
④	A160382H BO4G50N0	24	14~27.6	-10~70	18000	0.81	19.3	60.0	1.70	3.9	98.6	65.1
⑤	A160382H BO4G60N0	24	14~27.6	-10~70	16000	0.63	15.1	53.4	1.51	2.9	73.6	62.4
⑥	A160382H BO4G70N0	24	14~27.6	-10~70	14000	0.39	9.4	46.2	1.31	2.6	65.8	59.1

* All models are available with GR487 customization options; please contact Suzhou Longwin sales for details.