

DC Brushless Fan

80X80X25 mm

for Salt Spray Environment


iSALT Fan Series
RoHS compliant

IEC 60068-2-52 standard




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 87.5g
- Lead Wires : UL10368 AWG26 OR Equivalent

■ Air Flow-Static Pressure Characteristics

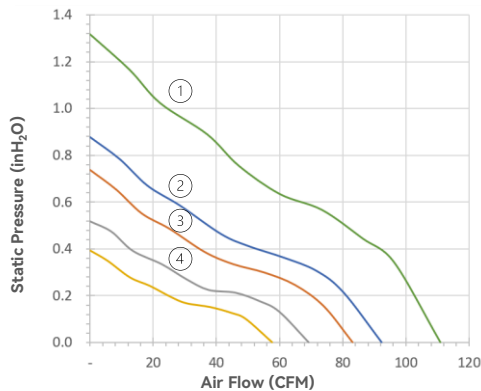

■ Dimensions drawing (mm)

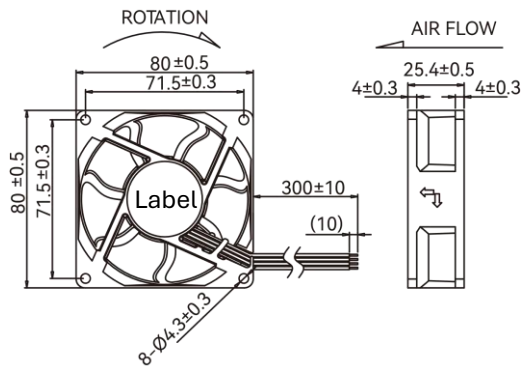

Model No.		Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
		VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
①	A380251S B4GN40N0	12	10~13.8	-10~70	9000	1.95	23.4	110.9	3.14	1.32	33.5	59.5
②	A180251H BO4G10N0	12	6~13.8	-10~70	7200	1.20	14.4	92.2	2.61	0.88	22.3	58.0
③	A180251H BO4G20N0	12	6~13.8	-10~70	6500	0.81	9.7	83.1	2.35	0.74	18.7	53.1
④	A180251H BO4G30N0	12	6~13.8	-10~70	5500	0.48	5.8	69.3	1.96	0.52	13.1	51.5
⑤	A180251H BO4G40N0	12	6~13.8	-10~70	4600	0.31	3.7	57.7	1.63	0.39	10.0	43.3
①	A180252H B4GN30N0	24	14~27.6	-10~70	9000	0.98	23.4	110.9	3.14	1.32	33.5	59.5
②	A180252H B4GN40N0	24	14~27.6	-10~70	7200	0.60	14.4	92.2	2.61	0.88	22.3	58.0
③	A180252H B4GN50N0	24	14~27.6	-10~70	6500	0.41	9.7	83.1	2.35	0.74	18.7	53.1
④	A180252H B4GN60N0	24	14~27.6	-10~70	5500	0.24	5.8	69.3	1.96	0.52	13.1	51.5
⑤	A180252H B4GN70N0	24	14~27.6	-10~70	4600	0.16	3.7	57.7	1.63	0.39	10.0	43.3

* All models are available with GR487 customization options; please contact Suzhou Longwin sales for details.

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
www.i-longwin.com
Suzhou Longwin High-Tech Co., LTD