

DC Brushless Fan

80X80X38 mm


for Salt Spray Environment

iSALT Fan Series
RoHS compliant
IEC 60068-2-52 standard




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 148 g
- Lead Wires : UL10368 AWG22 OR Equivalent

■ Air Flow-Static Pressure Characteristics

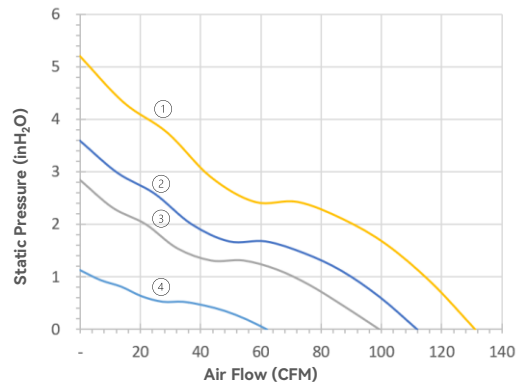

■ Dimensions drawing (mm)

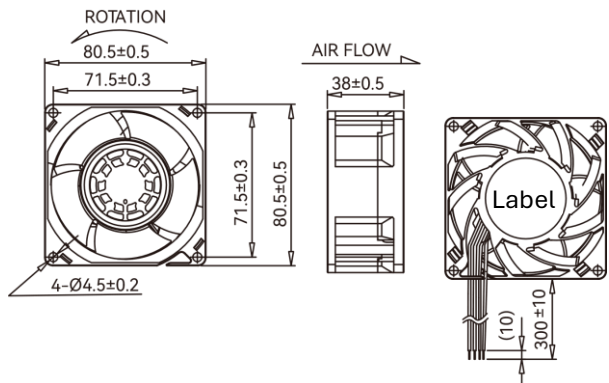

Model No.	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
							CFM	m ³ /min	inH ₂ O	mmH ₂ O	
① A380381H BQ4G20	12	10~13.8	-10~70	16000	4.40	52.8	131.3	3.7	5.20	132.0	73.2
② A180381H BQ4G30N0	12	7~13.8	-10~70	13500	2.40	28.8	111.9	3.2	3.60	91.3	70.3
③ A180381M B4GN50P0	12	7~13.8	-10~70	12000	1.80	21.6	99.5	2.8	2.84	72.2	65.5
④ A180381M B4GN70P0	12	7~13.8	-10~70	7500	0.50	6.00	62.1	1.8	1.14	28.8	55.0
① A180382H B4GN20P0	24	14~27.6	-10~70	16000	2.20	52.8	131.3	3.7	5.20	132.0	73.2
② A180382M B4GN30P0	24	14~27.6	-10~70	13500	1.20	28.8	111.9	3.2	3.60	91.3	70.3
③ A180382M B4GN50P0	24	14~27.6	-10~70	12000	0.90	21.6	99.5	2.8	2.84	72.2	65.5
④ A180382M B4GN70P0	24	14~27.6	-10~70	7500	0.25	6.00	62.1	1.8	1.14	28.8	55.0

* All models are available with GR487 customization options; please contact Suzhou Longwin sales for details.

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.
www.i-longwin.com
Suzhou Longwin High-Tech Co., LTD