

DC Brushless Fan

# 92X92X25 mm


for Salt Spray Environment

iSALT Fan Series  
RoHS compliant  
IEC 60068-2-52 standard




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 109.8 g
- Lead Wires : UL10368 AWG26 OR Equivalent

■ Air Flow-Static Pressure Characteristics

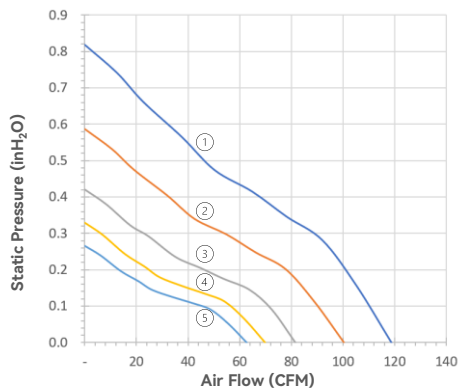

■ Dimensions drawing (mm)

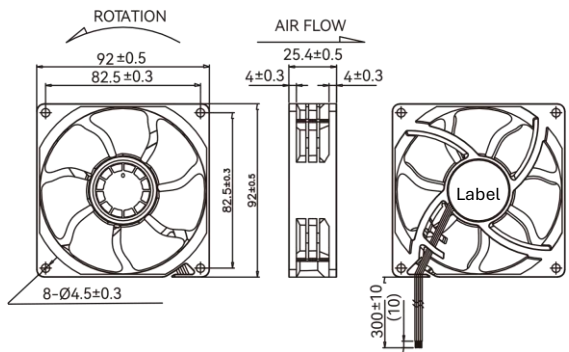

| Model No. |                   | Rated Voltage | Operating Voltage Range | Operating Temp. | Speed | Input Current | Input Power | Maximum Air Flow |                     | Maximum Air Pressure |                    | Noise @1M |
|-----------|-------------------|---------------|-------------------------|-----------------|-------|---------------|-------------|------------------|---------------------|----------------------|--------------------|-----------|
|           |                   | VDC           | VDC                     | °C              | RPM   | Amp           | Watt        | CFM              | m <sup>3</sup> /min | inH <sub>2</sub> O   | mmH <sub>2</sub> O | dB(A)     |
| ①         | A192251S B4GN20N0 | 12            | 6~13.8                  | -10~70          | 6500  | 1.50          | 18.0        | 118.7            | 3.36                | 0.82                 | 20.8               | 57.8      |
| ②         | A192251S B4GN30N0 | 12            | 6~13.8                  | -10~70          | 5500  | 0.93          | 11.1        | 100.4            | 2.84                | 0.59                 | 14.9               | 51.0      |
| ③         | A192251H BO4G40N0 | 12            | 6~13.8                  | -10~70          | 4500  | 0.45          | 5.3         | 81.7             | 2.31                | 0.42                 | 10.7               | 46.5      |
| ④         | A192251H BO4G50N0 | 12            | 6~13.8                  | -10~70          | 3900  | 0.29          | 3.4         | 69.8             | 1.97                | 0.33                 | 8.4                | 42.0      |
| ⑤         | A192251H BO4G60N0 | 12            | 6~13.8                  | -10~70          | 3500  | 0.21          | 2.5         | 62.6             | 1.77                | 0.27                 | 6.7                | 38.4      |
| ①         | A192252M B4GN20N0 | 24            | 14~27.6                 | -10~70          | 6500  | 0.75          | 18.0        | 118.7            | 3.36                | 0.82                 | 20.8               | 57.8      |
| ②         | A192252M B4GN30N0 | 24            | 14~27.6                 | -10~70          | 5500  | 0.46          | 11.1        | 100.4            | 2.84                | 0.59                 | 14.9               | 51.0      |
| ③         | A192252L B4GN40N0 | 24            | 14~27.6                 | -10~70          | 4500  | 0.22          | 5.3         | 81.7             | 2.31                | 0.42                 | 10.7               | 46.5      |
| ④         | A192252L B4GN50N0 | 24            | 14~27.6                 | -10~70          | 3900  | 0.14          | 3.4         | 69.8             | 1.97                | 0.33                 | 8.4                | 42.0      |
| ⑤         | A192252L B4GN60N0 | 24            | 14~27.6                 | -10~70          | 3500  | 0.10          | 2.5         | 62.6             | 1.77                | 0.27                 | 6.7                | 38.4      |

\* All models are available with GR487 customization options; please contact Suzhou Longwin sales for details.

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.  
www.i-longwin.com  
Suzhou Longwin High-Tech Co., LTD