

DC Brushless Fan

92X92X38 mm


for Salt Spray Environment

iSALT Fan Series
RoHS compliant
IEC 60068-2-52 standard




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-/FG/PWM
- Weight: 259g
- Lead Wires : UL10368 AWG22 OR Equivalent

■ Air Flow-Static Pressure Characteristics

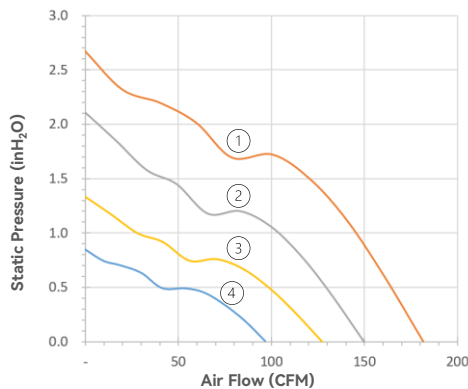

■ Dimensions drawing (mm)

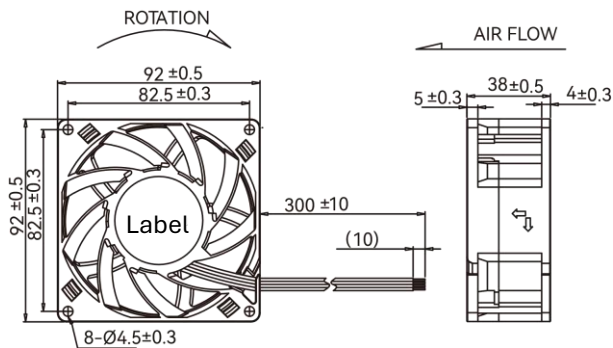

Model No.	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @1M
	VDC	VDC	°C	RPM	Amp	Watt	CFM	m ³ /min	inH ₂ O	mmH ₂ O	dB(A)
② A192381M 4GN30N0	12	7~13.8	-10~70	10000	2.40	28.8	149.6	4.2	2.11	48.7	62.0
③ A192381M 4GN40N0	12	7~13.8	-10~70	8500	1.54	18.5	127.1	3.6	1.33	30.0	58.5
④ A192381M 4GN50N0	12	7~13.8	-10~70	6500	0.71	8.5	96.5	2.7	0.85	21.6	52.9
① A192382H B4GN20N0	24	14~27.6	-10~70	11900	2.15	51.6	181.8	5.1	2.67	67.8	69.0
② A192382M BQ4G30	24	14~27.6	-10~70	10000	1.20	28.8	149.6	4.2	2.11	48.7	62.0
③ A192382M BQ4G40	24	14~27.6	-10~70	8500	0.77	18.5	127.1	3.6	1.33	30.0	58.5
④ A192382M BQ4G50	24	14~27.6	-10~70	6500	0.35	8.5	96.5	2.7	0.85	21.6	52.9

* All models are available with GR487 customization options; please contact Suzhou Longwin sales for details.