



## iCloud Fan 92\*92\*38 MM

### DIMENSION DRAWING

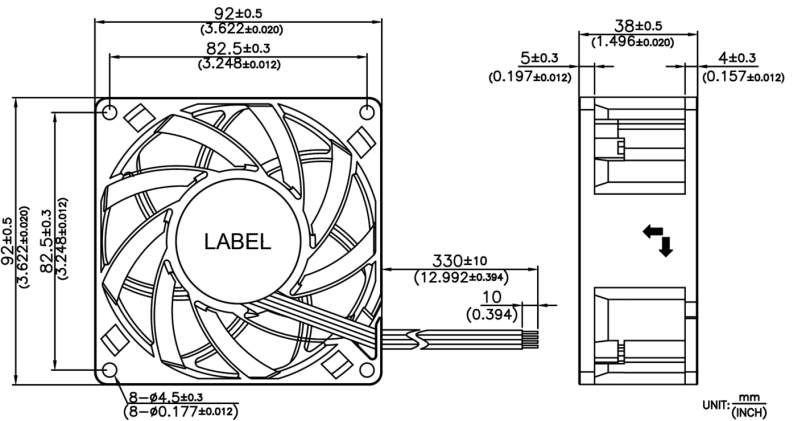

- Housing : Plastic (UL 94V-0)
- Impeller : Plastic (UL 94V-0)
- Bearing : Ball bearing
- Lead Wires : UL10368 AWG22 OR Equivalent
- Mass : 260g

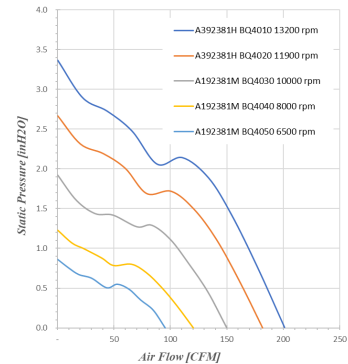

產品別	Model No.		Control Type	Bearing Type	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure			Noise
					VDC	VDC	°C	R.P.M	Amp	Watt	CFM	m <sup>3</sup> /min	inH2O	mmH2O	Pa	
9238 12V Series	A392381H	BQ4010	+/-/FG/PWM	Ball	12	10.8~13.2	-10~70	13200	5.61	67.3	201.0	5.7	3.37	85.6	839	71.9
	A392381H	BQ4020	+/-/FG/PWM	Ball	12	10.8~13.2	-10~70	11900	4.10	49.2	181.8	5.1	2.67	67.8	665	69.0
	A192381M	BQ4030	+/-/FG/PWM	Ball	12	6.5~13.2	-10~70	10000	2.40	28.8	149.6	4.2	1.92	48.7	478	62.0
	A192381M	BQ4040	+/-/FG/PWM	Ball	12	6.5~13.2	-10~70	8000	1.17	14.0	120.2	3.4	1.18	31.2	294	58.2
	A192381M	BQ4050	+/-/FG/PWM	Ball	12	6.5~13.2	-10~70	6500	0.63	7.5	95.3	2.7	0.85	21.8	212	52.9
9238 24V Series	A392382H	BQ4010	+/-/FG/PWM	Ball	24	21.6~26.4	-10~70	13200	2.81	67.3	201.0	5.7	3.37	85.6	839	71.9
	A392382H	BQ4020	+/-/FG/PWM	Ball	24	21.6~26.4	-10~70	11900	2.05	49.2	181.8	5.1	2.67	67.8	665	69.0
	A192382M	BQ4030	+/-/FG/PWM	Ball	24	21.6~26.4	-10~70	10000	1.20	28.8	149.6	4.2	1.92	48.7	478	62.0
	A192382M	BQ4040	+/-/FG/PWM	Ball	24	21.6~26.4	-10~70	8000	0.58	14.0	120.2	3.4	1.18	31.2	294	58.2
	A192382M	BQ4050	+/-/FG/PWM	Ball	24	21.6~26.4	-10~70	6500	0.31	7.5	95.3	2.7	0.85	21.8	212	52.9
9238 48V Series	A192384H	BQ4010	+/-/FG/PWM	Ball	48	36~57	-10~70	13200	1.40	67.3	201.0	5.7	3.37	85.6	839	71.9
	A192384H	BQ4020	+/-/FG/PWM	Ball	48	36~57	-10~70	11900	1.03	49.2	181.8	5.1	2.67	67.8	665	69.0
	A192384H	BQ4030	+/-/FG/PWM	Ball	48	36~57	-10~70	10000	0.60	28.8	149.6	4.2	1.92	48.7	478	62.0
	A192384H	BQ4040	+/-/FG/PWM	Ball	48	36~57	-10~70	8000	0.29	14.0	120.2	3.4	1.18	31.2	294	58.2
	A192384H	BQ4050	+/-/FG/PWM	Ball	48	36~57	-10~70	6500	0.16	7.5	95.3	2.7	0.85	21.8	212	52.9