


60X60X56 mm




- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Bearing: Ball bearings
- Control Options: +/-FG/PWM
- Weight: 190 g
- Lead Wires : UL10368 AWG26 OR Equivalent

■ Air Flow-Static Pressure Characteristics

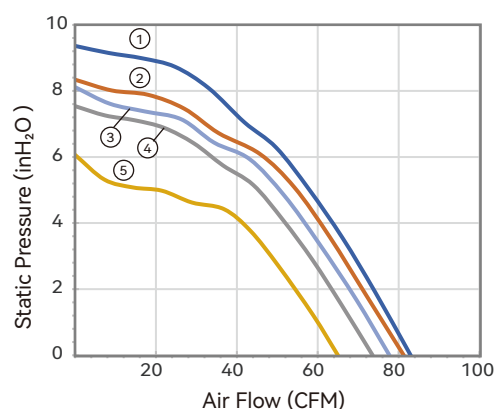

■ Dimensions drawing

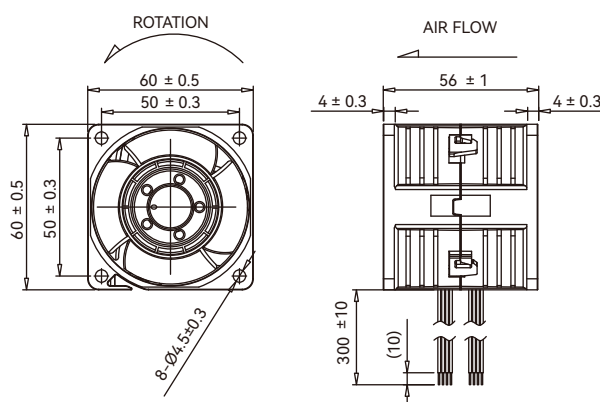

Model No.	Rated Voltage VDC	Operating Voltage Range VDC	Operating Temp. °C	Speed RPM	Input Current Amp	Input Power Watts	Maximum Air Flow		Maximum Air Pressure		Noise @1M dB(A)
							CFM	m ³ /min	inH ₂ O	mmH ₂ O	
① D360561S BP8010W0	12	10.8~13.2	-10~70	23000 23500	4.41	52.9	83.0	2.3	9.4	238	81.3
② D360561S BP8020W0	12	10.8~13.2	-10~70	21900 24000	4.25	51.0	81.3	2.3	8.3	212	80.1
③ D360561S BP8030W0	12	10.8~13.2	-10~70	21200 22400	3.73	44.7	77.7	2.2	8.1	206	79.5
④ D360561S BP8040W0	12	10.8~13.2	-10~70	20300 21500	3.18	38.1	73.6	2.1	7.5	191	78.8
⑤ D360561S BP8060W0	12	10.8~13.2	-10~70	17100 19600	2.11	25.4	65.0	1.8	6.1	154	75.5
① D160564S B80N10W0	48	36~57	-10~70	23000 23500	1.14	54.5	83.0	2.3	9.4	238	81.3
② D160564S B80N20W0	48	36~57	-10~70	21900 24000	1.09	52.5	81.3	2.3	8.3	212	80.1
③ D160564S B80N30W0	48	36~57	-10~70	21200 22400	0.96	46.0	77.7	2.2	8.1	206	79.5
④ D160564S B80N40W0	48	36~57	-10~70	20300 21500	0.82	39.2	73.6	2.1	7.5	191	78.8
⑤ D160564S B80N60W0	48	36~57	-10~70	17100 19600	0.54	26.1	65.0	1.8	6.1	154	75.5

Notes: Specifications are subject to change without notice. Please refer to the product data sheet provided by our sales.

www.i-longwin.com

Suzhou Longwin High-Tech Co., LTD